

Merlin Gerin

LV switch-disconnectors

Interpact 40 to 2500A



Merlin Gerin

Modicon

Telemecanique



LV switch-disconnectors



Interpact from 40 to 2500 A	4
------------------------------------	----------

Typical low-voltage applications	6
---	----------

Compact from 80 to 1250 A	7
----------------------------------	----------

Masterpact from 800 to 6300 A	8
--------------------------------------	----------

Product Panorama	9
-------------------------	----------

Functions and characteristics	17
--------------------------------------	-----------

Installation and connection	47
------------------------------------	-----------

Technical details	71
--------------------------	-----------

Product references	77
---------------------------	-----------

LV switch-disconnectors

Interpact from 40 to 2500 A

Interpact INS from 40 to 630A



Interpact INS switch-disconnector
from 40 to 80 A

Interpact INS switch-disconnector
from 100 to 160 A

- Circuit control and isolation.
- Industrial devices with modular profile from 40 to 160A.
- Industrial devices from 100 to 2500 A for installation in functional and universal switchboards.
- Front or lateral handle are available on the same device (up to INS250).



Interpact INS250
switch-disconnector



Interpact INS switch-disconnector
from 400 to 630 A

Interpact IN from 1000 to 2500 A



Interpact IN1600 switch-disconnector

Compact from 80 to 1250 A (See Compact catalogue)



Compact switch-disconnector

- Circuit control and isolation.
- Additional functions for safety, remote control and convenience:
 - ☐ Earth-fault protection.
 - ☐ MN/MX auxiliary releases.
 - ☐ Motor mechanism.
 - ☐ Ammeter.
 - ☐ Source changeover.
- Homogeneity with respect to Compact circuit breakers in the same switchboard.



Compact switch-disconnector
equipped with Vigi
earth fault protection module




Compact switch-disconnector
with motor-mechanism



MN/MX
voltage
release

LV switch-disconnectors

Typical low-voltage applications

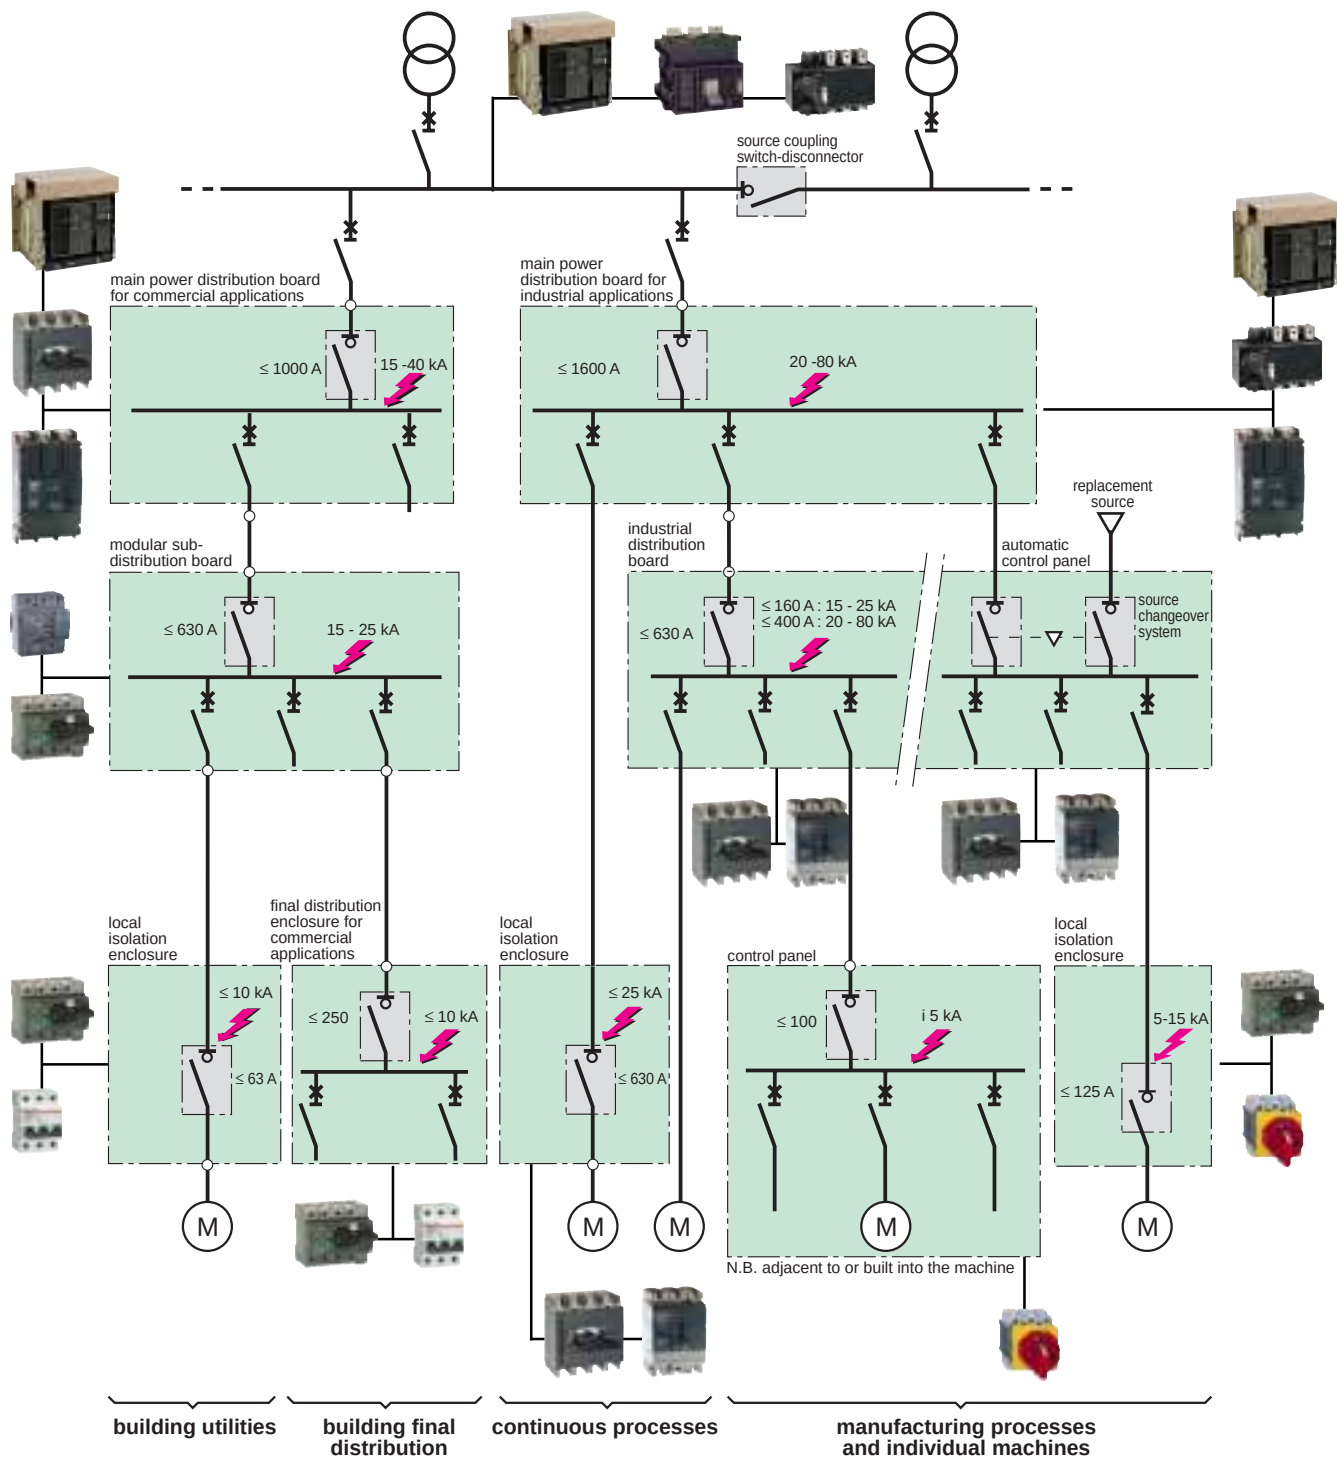

Legend



Masterpact



Compact C



Interpact INS



Compact NS



Vario



Compact CM



Interpact IN



Interpact INS



Multi 9



Masterbloc main power distribution board with Masterpact switch-disconnectors



Prisma P & G sub-distribution board with Interpact switch-disconnectors



Isobar 4 final distribution boards using Interpact at 250Amp

Switch disconnectors for standby applications

- Merlin Gerin Masterpact, Compact CM and Interpact IN switch-disconnectors.
- Current ratings: up to 6300A.
- Standards: IEC 947-3 BS EN 60947-3, EN 60947-3.
- Catalogue: Masterpact, Compact CM, Interpact (see following pages).

Main power distribution boards for commercial and industrial applications

- Merlin Gerin Masterpact, Interpact INS/IN and Compact C switch-disconnectors.
- Current ratings: 400 to 1000 A for commercial applications and 400 to 1600 A for industrial applications.
- Standards: IEC 947-3 BS EN 60947-3, EN 60947-3.
- Catalogue: Masterpact, Compact, Interpact (see following pages).

Industrial switchboards and automatic-control panels

- Merlin Gerin Interpact INS and Compact NS switch-disconnectors.
- Current ratings: up to 400A.
- Standards: IEC 947-3 BS EN 60947-3, EN 60947-3.
- Catalogue: Compact, Interpact (see following pages).

Sub-distribution boards for modular products

- Merlin Gerin Interpact INS and NG 125 switch-disconnectors.
- Current ratings: up to 160A.
- Standards: IEC 947-3 BS EN 60947-3, EN 60947-3.
- Catalogue: Multi 9, Interpact (see following pages).

Local isolation enclosures

- Merlin Gerin switch-disconnectors:
 - Interpact INS and Multi 9 (low ratings).
 - Interpact INS and Compact NS.
- Telemecanique switch-disconnectors (12 to 175A).
- Current ratings: up to 63 A (low ratings), up to 630A (industry).
- Standards: IEC 947-3 BS EN 60947-3, EN 60947-3.
- Catalogue: Compact, Interpact (see following pages), Telemecanique.

Small distribution enclosures for commercial applications

- Merlin Gerin Interpact INS and Multi 9 switch-disconnectors.
- Current ratings: up to 63A
- Standards: IEC 947-3 BS EN 60947-3, EN 60947-3.
- Catalogue: Multi 9, Interpact (see following pages).

Control panels

- Telemecanique Vario switch-disconnectors.
- Current ratings: up to 60/80A.
- Standards: IEC 947-3 BS EN 60947-3, EN 60947-3.
- Catalogue: Telemecanique.

Local isolation enclosures (manufacturing processes and individual machines)

- Interpact INS and Telemecanique Vario switch-disconnectors.
- Current ratings: up to 63/80 A (Vario) and > 63/80 A (Interpact INS).
- Standards: IEC 947-3 BS EN 60947-3, EN 60947-3.
- Catalogue: Interpact (see following pages), Telemecanique.

LV switch-disconnectors

Masterpact from 800 to 6300A

(See Masterpact catalogue)

- Circuit control and isolation.
- High making capacity and electrodynamic withstand.
- Additional functions for safety and convenience:
 - ☐ MN/MX auxiliary releases.
 - ☐ XF closing release.
 - ☐ Motor mechanism.
 - ☐ Source changeover.



Masterpact switch-disconnector