



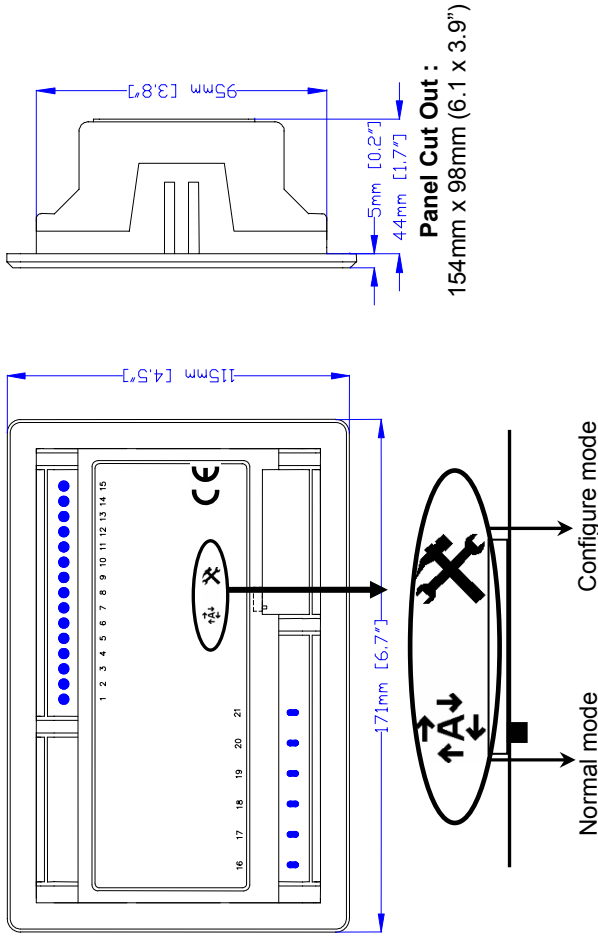

4130 INSTALLATION INSTRUCTIONS

- **Configuration Mode** is selected by operation of a small switch on the rear, bottom edge of the PCB. This is partially hidden to prevent accidental operation
- Once Configuration Mode is selected, the 'Auto' LED will commence rapid flashing. When in Configuration Mode all normal operation is suspended.
- The 'Manual On Load' pushbutton can be used to select the LED 'code' that corresponds to the required function. The 5 left hand LED's will form the code.
- The 'Manual Off Load' pushbutton will allow the user to change the function parameters. The 3 right-hand LED's inform the user of the current setting for the chosen function.
- When the required parameters are displayed, pressing the 'Auto' button will save the new setting. The process is repeated for each function change.
- When configuration is complete, the Configuration Mode Selector Switch should be returned to the 'Normal' position. A key to all configuration options is provided overleaf on the Functions and Parameters table.

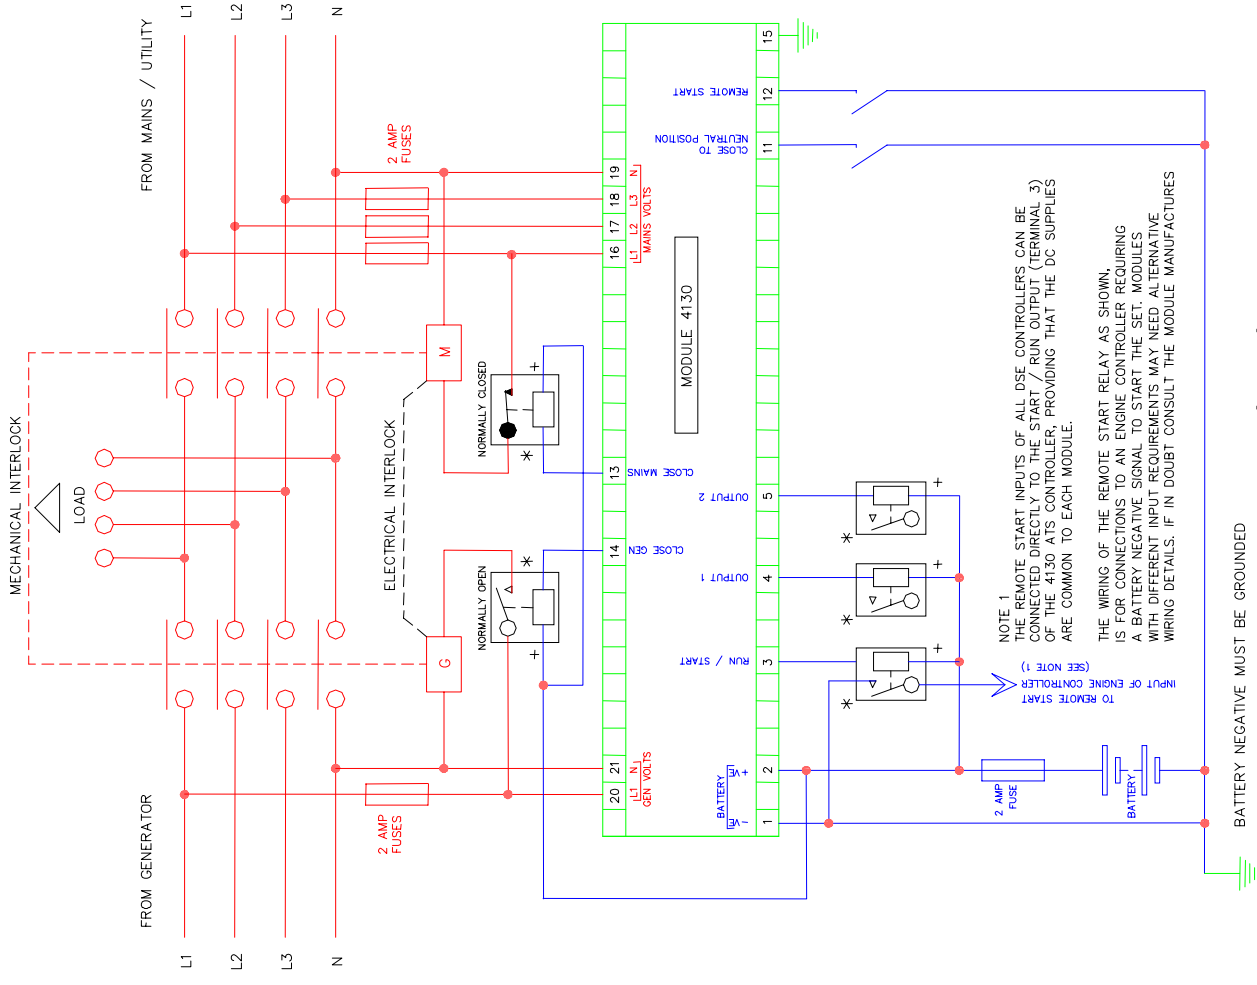

Deep Sea Electronics Plc.

Highfield House, Hunmanby Industrial Estate,
North Yorkshire. YO14 0PH.
ENGLAND

Tel: +44 (0)1723 890099.

Fax: +44 (0)1723 893303.

Email: sales@deepseapl.com

Web: www.deepseapl.com

Deep Sea Electronics inc.

5301 E. State St. - Suite 202
Rockford, Illinois 61108
U.S.A.

Phone: +1 (815) 316-8706

Fax: +1 (815) 316-8708

Email: dsesales@deepseausa.com

Web: www.deepseausa.com

Functions and configuration table			
Function	Function code	Value code	Value (<i>Default in bold Italics</i>)
Start Delay	○ ○ ○ ● ○	○ ○ ○	0 Seconds
		○ ○ ●	5 Seconds
		○ ● ○	10 Seconds
		○ ● ●	15 Seconds
		● ○ ○	20 Seconds
		● ○ ●	30 Seconds
		● ● ○	60 Seconds
		● ● ●	180 Seconds
Mains (utility) return delay	○ ○ ○ ● ●	○ ○ ○	0 Seconds
		○ ○ ●	5 Seconds
		○ ● ○	10 Seconds
		○ ● ●	15 Seconds
		● ○ ○	20 Seconds
		● ○ ●	30 Seconds
		● ● ○	60 Seconds
		● ● ●	180 Seconds
Warming	○ ○ ● ○ ●	○ ○ ○	0 Seconds
		○ ○ ●	5 Seconds
		○ ● ○	10 Seconds
		○ ● ●	15 Seconds
		● ○ ○	20 Seconds
		● ○ ●	30 Seconds
		● ● ○	60 Seconds
		● ● ●	180 Seconds
Cooling	○ ○ ● ● ○	○ ○ ○	0 Seconds
		○ ○ ●	5 Seconds
		○ ● ○	10 Seconds
		○ ● ●	15 Seconds
		● ○ ○	20 Seconds
		● ○ ●	30 Seconds
		● ● ○	60 Seconds
		● ● ●	180 Seconds
Remote start input type	○ ● ● ● ○	○ ○ ○	Remote Start
		○ ○ ●	Simulated mains
Remote start function (Not used when simulated mains is selected)	○ ● ● ● ●	○ ○ ○	Remote start is off load
		○ ○ ●	Remote start is on load
Auxiliary Output 1 Function	● ○ ○ ● ○	○ ○ ○	Not Used
		○ ○ ●	Mains (utility) Fail
		○ ● ○	Generator Available
		○ ● ●	Generator on Load
		● ○ ○	Mains On Load
		● ○ ●	System in Auto
		● ● ○	Close to Neutral position
Auxiliary Output 2 Function	● ○ ○ ● ●	○ ○ ○	Not Used
		○ ○ ●	Mains (utility) Fail
		○ ● ○	Generator Available
		○ ● ●	Generator on Load
		● ○ ○	Mains On Load
		● ○ ●	System in Auto
		● ● ○	Close to Neutral position
Mains (utility) Under Voltage	● ○ ● ○ ○	○ ○ ○	60V / 70V
		○ ○ ●	70V / 80V
		○ ● ○	80V / 90V
		○ ● ●	90V / 100V
		● ○ ○	120V / 140V
		● ○ ●	140V / 160V
		● ● ○	160V / 180V
		● ● ●	180V / 200V