


SPEED MONITOR



**KATOLIGHT'S
SPEED MONITOR SM124
PROTECTS GENERATOR
SETS AGAINST
ENGINE OVERSPEED**

SPECIFICATIONS

- **Construction:** Epoxy Encapsulated
- **Voltage:** 12 or 24 VDC Part #35083
- **Sensing:** 120 VAC
- **Accuracy:** $\pm .5$ Hz
- **Operating Trip Point:** 66.5 or 71 Hz (Selectable)
- **Switch Contact Rating:** .6 Amp 120 VAC Resistive
2 Amp 40 VDC
- **Operating Temperature:** -40 to +70°C. -40 to -158°F.
- **Current Draw:** .07 A max.
- **Mounting:** 2-Holes

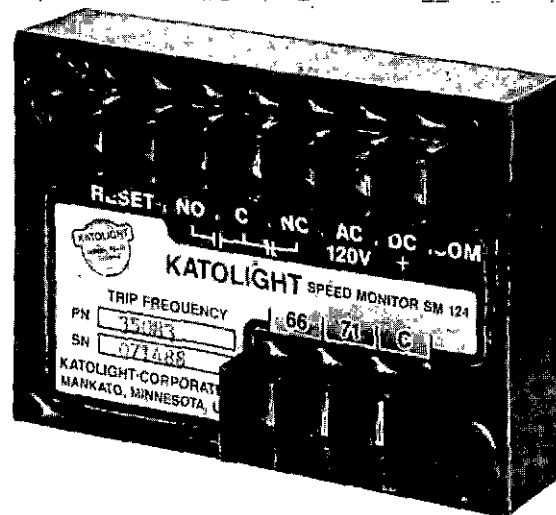

Dimensions

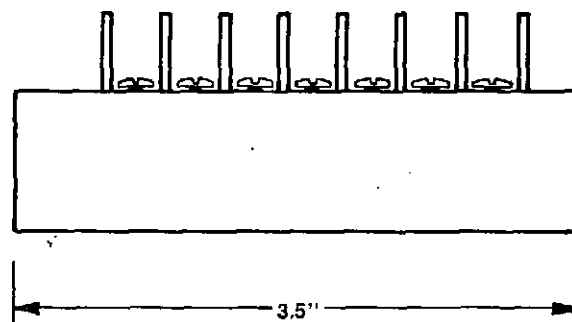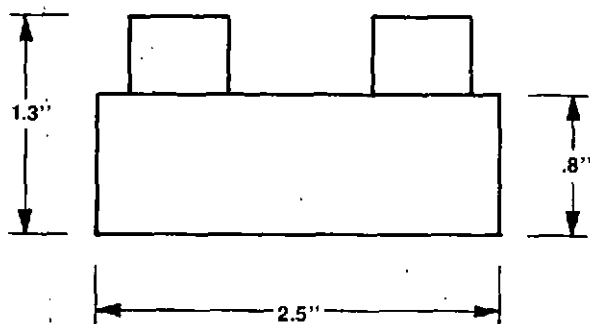

CONTACT:

KATOLIGHT CORPORATION





3201 THIRD AVENUE, P.O. BOX 3229

MANKATO, MN 56002-3229

(507) 625-7973 • FAX: (507) 625-2968 • TELEX: 29-0787

Dependable Electrical Generating Equipment For Over 35 Years.

Form SM-888

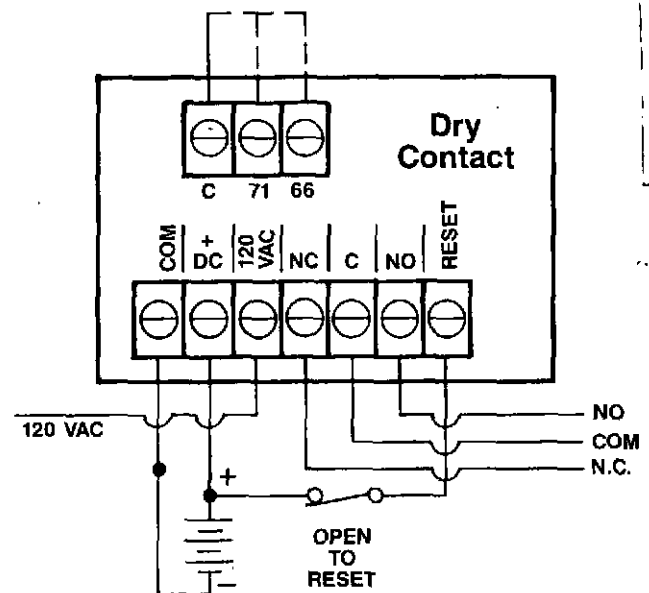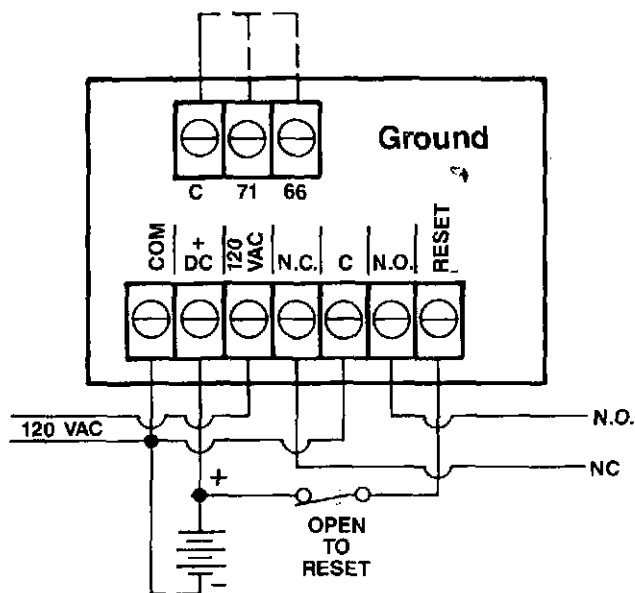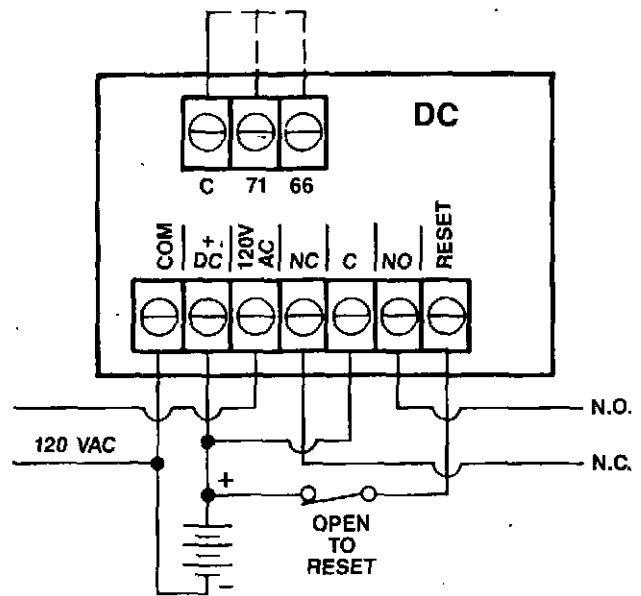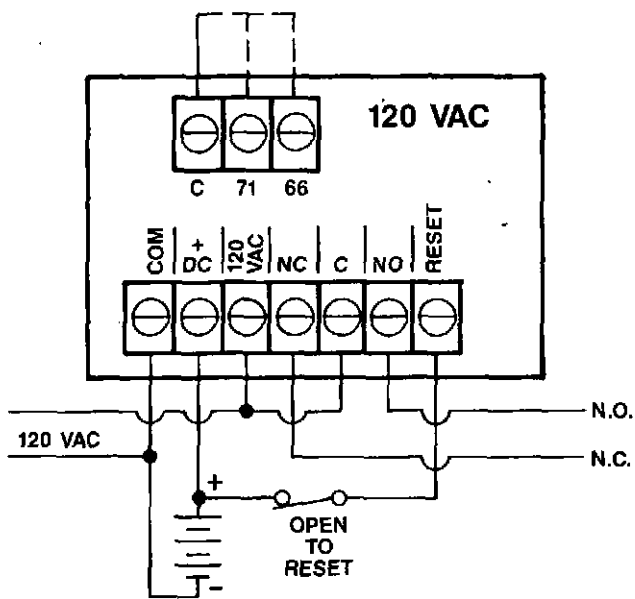

Alternative Applications

* NOTE: Install jumper between Common (C) and 66 or 71 to select trip frequency.

