



Service Information System

Previous Screen

Welcome: b375ji

Product: MARINE ENGINE
 Model: 3406E MARINE ENGINE 9WR01584
 Configuration: 3406E Marine Engine 9WR00001-UP

Disassembly and Assembly 3406E Marine Engine

Media Number -SEN1169-03

Publication Date -01/10/2007

Date Updated -18/10/2007

i02346853

Rocker Arm and Shaft - Remove

SMCS - 1102-011

Removal Procedure

Table 1

Required Tools			
Tool	Part Number	Part Description	Qty
A	124-2946	Lifting Bracket	1

Start By:

- Remove the valve mechanism cover. Refer to Disassembly and Assembly, "Valve Mechanism Cover - Remove and Install".
- Remove the compression brake, if equipped. Refer to Disassembly and Assembly, "Compression Brake - Remove".

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

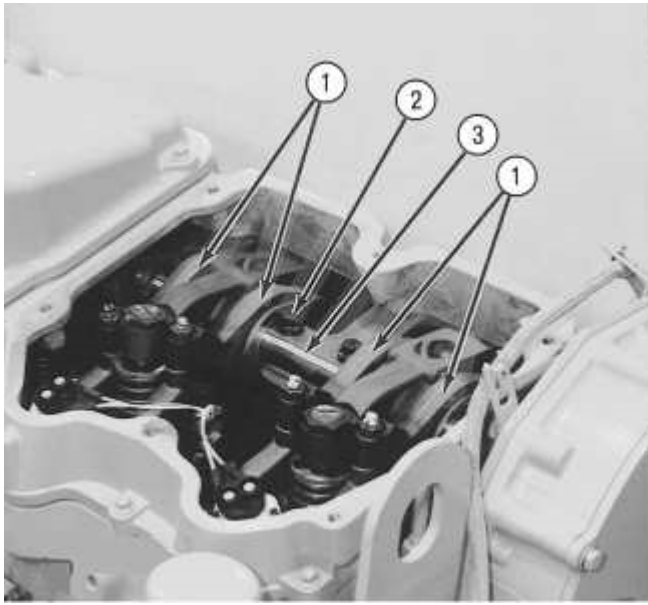


Illustration 1

g00517442

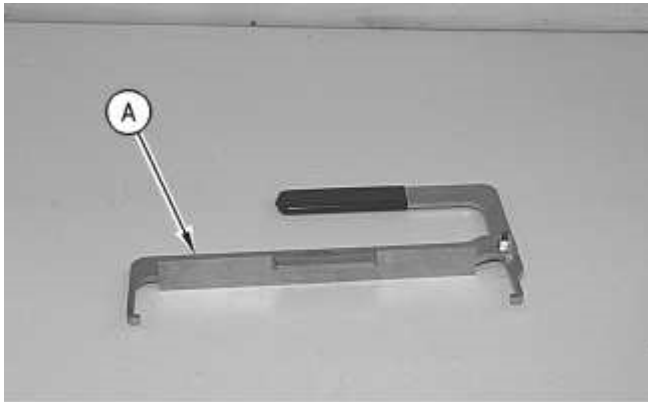


Illustration 2

g00517462

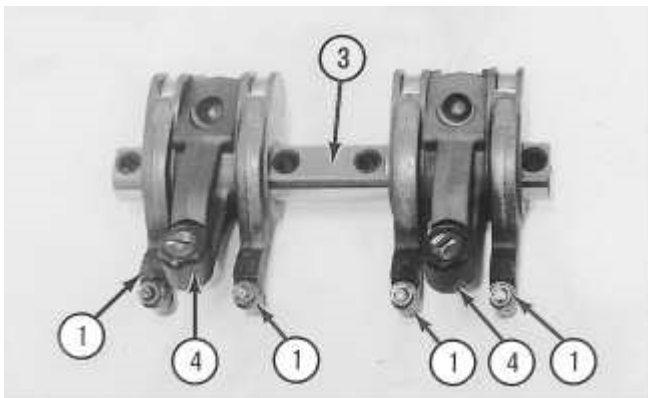


Illustration 3

g00517457



Valve rocker arms and unit injector rocker arms can move on the shaft after the bolts have been removed. The shaft should be kept level when removed from the cylinder head. To avoid possible personal injury, keep fingers clear of the valve rocker arms and the unit injector rocker arms when lifting the assembly from the cylinder head.

Note: If the engine is equipped with a compression brake, skip Step 1.

1. Remove bolts (2).
2. Remove rocker shaft (3), valve rocker arms (1), and unit injector rocker arms (4) as a unit with Tooling (A).
3. Repeat Steps 1 and 2 for the remainder of the rocker arm assemblies.

[Copyright 1993 - 2019 Caterpillar Inc.](#)

[All Rights Reserved.](#)

[Private Network For SIS Licensees.](#)

Sun Jul 28 10:53:05 EDT 2019

b375ji