



**SYNCHRONOUS AC GENERATOR  
TYPICAL DYNAMIC CHARACTERISTICS**

Basic Model: **431CSL6204**

Winding: **WC1901**

kW (kVA)	1800 RPM			60 Hertz			12 Leads		
	3 Phase			0.8 Power Factor			Dripproof or Open Enclosure		
	Class B		Class F				Class H		
Voltage*	80° C ⊕ Continuous	90° C ⊕ Lloyds	95° C ⊕ ABS	105° C † British Standard	105° C ⊕ Continuous	130° C ⊕ Standby	125° C † British Standard	125° C ⊕ Continuous	150° C ⊕ Standby
<b>240/480</b>	143 (179)	155 (194)	160 (200)	170 (213)	170 (213)	181 (226)	170 (213)	180 (225)	190 (238)
<b>230/460</b>	144 (180)	155 (194)	160 (200)	170 (213)	170 (213)	182 (228)	171 (214)	180 (225)	188 (235)
<b>220/440</b>	143 (179)	155 (194)	160 (200)	167 (209)	167 (209)	180 (225)	168 (210)	177 (221)	185 (231)
<b>208/416</b>	142 (178)	152 (190)	156 (195)	165 (206)	165 (206)	176 (220)	165 (206)	175 (219)	182 (228)
<b>190/380</b>	136 (170)	145 (181)	150 (188)	155 (194)	155 (194)	167 (209)	156 (195)	165 (206)	172 (215)

⊕ Rise by resistance method, Mil-Std-705, Method 680.1t

† Rating per BS 5000.

Submittal Data: 240/480 Volts*, 219 kVA, 1800 RPM, 60 Hz, 3 Phase					
Mil-Std-705B			Mil-Std-705B		
Method	Description	Value	Method	Description	Value
301.1b	Insulation Resistance	> 1.5 Meg	505.3b	Overspeed	2250 RPM
302.1a	High Potential Test		507.1c	Phase Sequence CCW-ODE	ABC
	Main Stator	2000 Volts	508.1c	Voltage Balance, L-L or L-N	0.2%
	Main Rotor	1500 Volts	601.4a	L-L Harmonic Maximum - Total	5.0%
	Exciter Stator	1500 Volts		(Distortion Factor)	
	Exciter Rotor	1500 Volts	601.4a	L-L Harmonic Maximum - Single	3.0%
	PMG Stator	1500 Volts**	601.1c	Deviation Factor	5.0%
401.1a	Stator Resistance, Line to Line		---	TIF (1960 Weightings)	<50
	High Wye Connection	0.049 Ohms	625.1c	Mechanical Strength (High Wye	
	Rotor Resistance	0.656 Ohms		Connection, Sustained 3 Phase	
	Exciter Stator	18.5 Ohms		Short Circuit Current) <sup>(3)</sup>	< 300%
	Exciter Rotor	0.116 Ohms	652.1a	Shaft Current	< 0.1 ma
	PMG Stator	2.1 Ohms**	652.1a	Main Stator Capacitance to	
410.1a	No Load Exciter Field Amps			Ground	0.013 mfd
	at 480 Volts Line to Line	0.64 A DC			
420.1a	Short Circuit Ratio	0.43			
421.1a	Xd Synchronous Reactance	2.788 pu			
422.1a	X2 Negative Sequence				
	Reactance	0.407 pu	--	Generator Frame	431
423.1a	X0 Zero Sequence Reactance	0.024 pu	--	Type	Ext. Voltage Regulated, Brushless
425.1a	X'd Transient Reactance	0.178 pu	--	Insulation	Class H
426.1a	X''d Subtransient Reactance	0.161 pu	--	Coupling - Single Bearing	Flexible
--	Xq Quadrature Synchronous		--	Amortisseur Windings	Full
	Reactance	1.371 pu	--	Cooling Air Volume	1100 CFM
427.1a	T'd Transient Short Circuit		--	Exciter	Rotating
	Time Constant	0.062 sec.	--	Voltage Regulator	SE350***
428.1a	T''d Subtransient Short Circuit		--	Voltage Regulation	1%***
	Time Constant	0.013 sec.	--	Sensing	1 Phase***
430.1a	T'do Transient Open Circuit				
	Time Constant	1.46 sec.			
432.1a	Ta Short Circuit Time				
	Constant of Armature Winding	0.017 sec.			

<sup>(3)</sup> Excitation support system or PMG required to sustain short circuit currents.

\* Voltage refers to wye (star) connection, unless otherwise specified.

\*\*Not supplied as standard equipment.





\*\*\*DVR<sup>®</sup>2000 voltage regulator supplied with PMG option. DVR<sup>®</sup>2000 voltage regulation 1/4%, 1 or 3 Phase sensing.




## SYNCHRONOUS AC GENERATOR TYPICAL DYNAMIC CHARACTERISTICS

Basic Model: **431CSL6204**



### 60 HERTZ

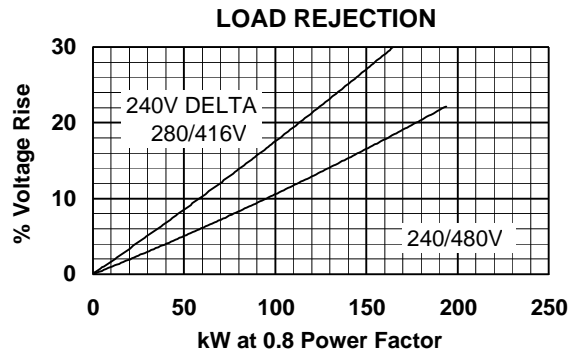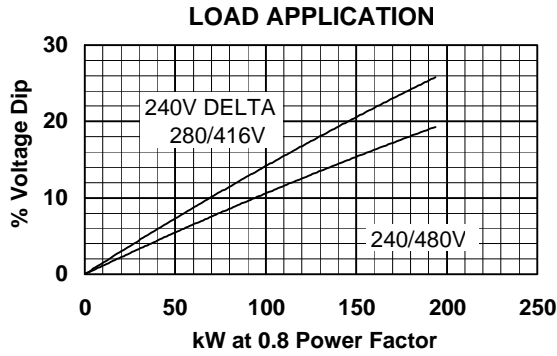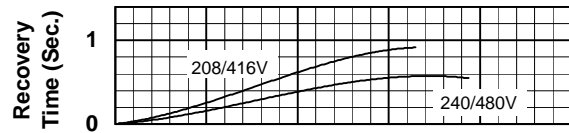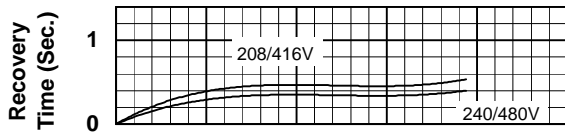

### TYPICAL MOTOR STARTING CHARACTERISTICS

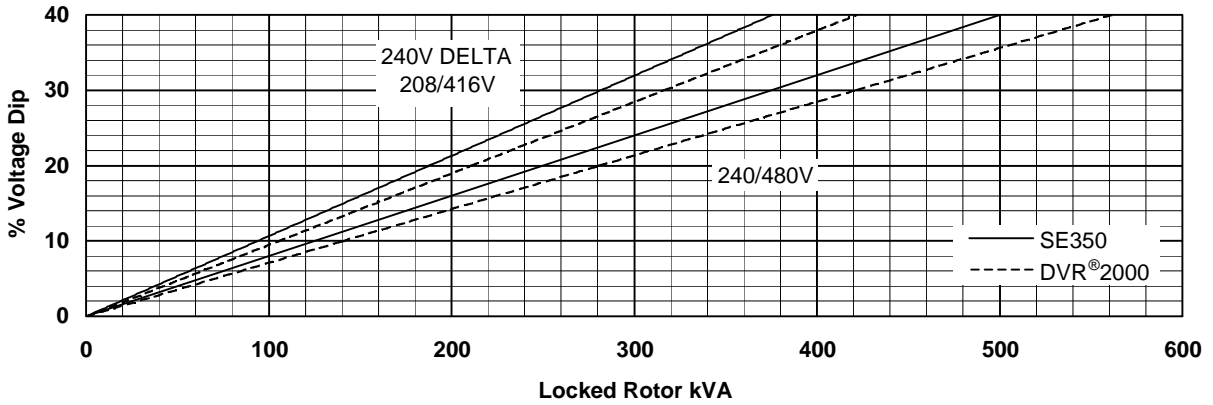

### TYPICAL GENERATOR EFFICIENCY

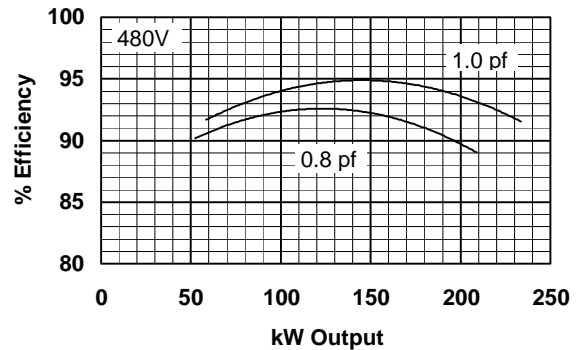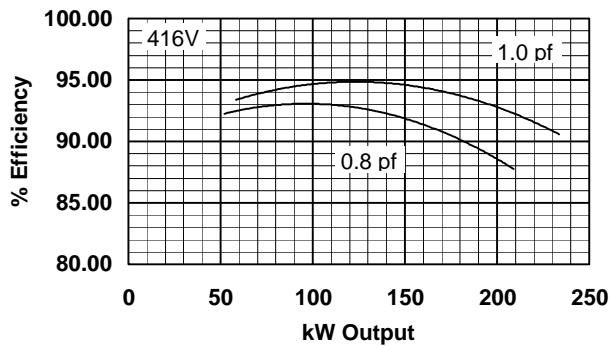

Voltage refers to wye (star) connection, unless otherwise specified.