




SPEED MONITOR


**KATOLIGHT'S NEW
SPEED MONITOR SM101
PROTECTS GENERATOR
SETS AGAINST
ENGINE OVERSPEED**

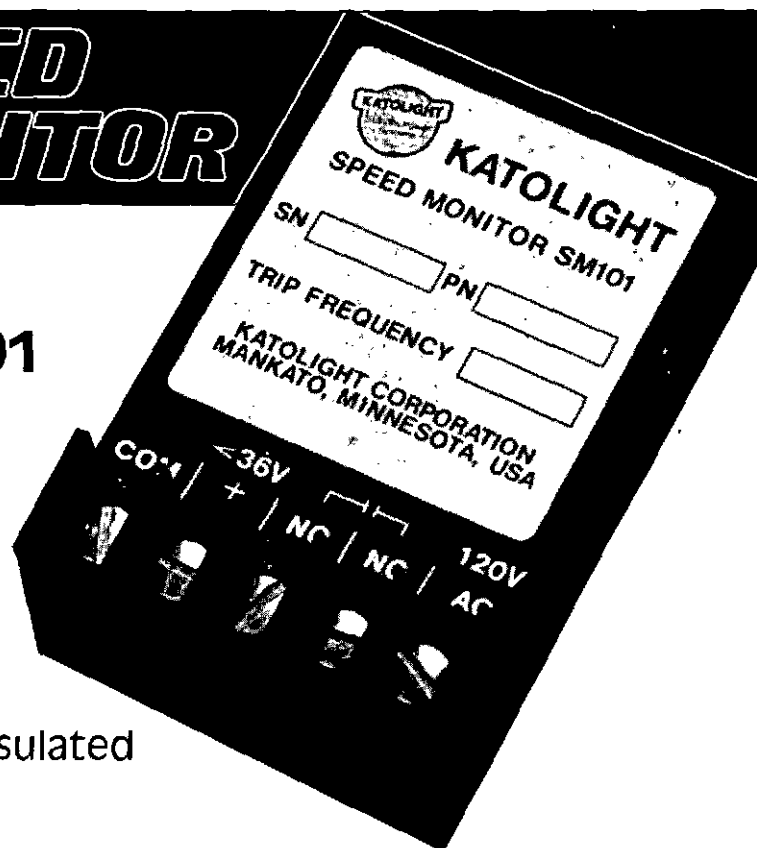

SPECIFICATIONS

- **Construction:** Epoxy Encapsulated
- **Voltage:** DC 12 to 36 V
- **Sensing Voltage:** 120 VAC
- **Accuracy:** $\pm .5$ Hz/Sec.
- **Operating Trip Point:** 66.5 or 71 Hz (Specify)
- **Switch Contact Rating:** 2 Amp 120 VAC Resistive
- **Operating Temperature:** -40 to $+70^{\circ}\text{C}$. -40 to $+158^{\circ}\text{F}$.
- **Current Draw:** @ 12 VDC .2 A max.
- **Mounting:** 2-Holes clearance for #6 screw

Dimensions

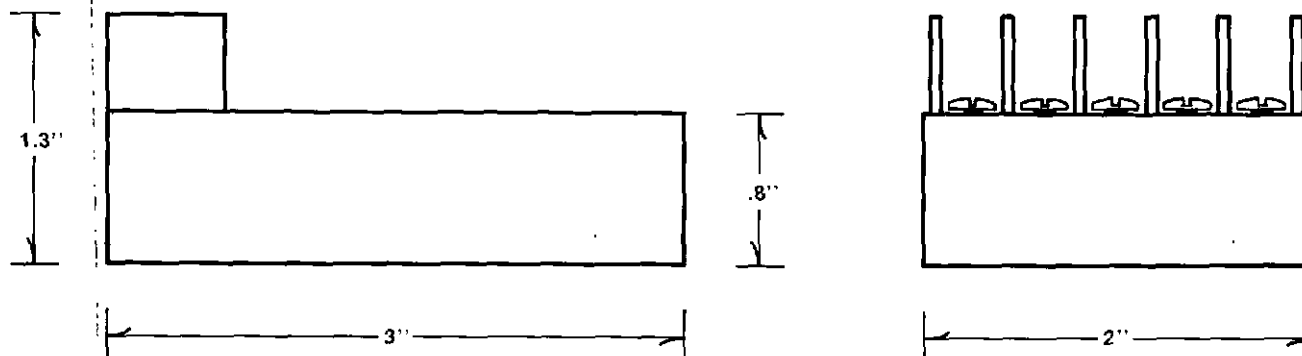


CONTACT:

KATOLIGHT CORPORATION

3201 THIRD AVENUE, P.O. BOX 3229
MANKATO, MN 56001
(507) 625-7973 • TELEX: 29-0787

Dependable Electrical Generating Equipment For Over 30 Years.

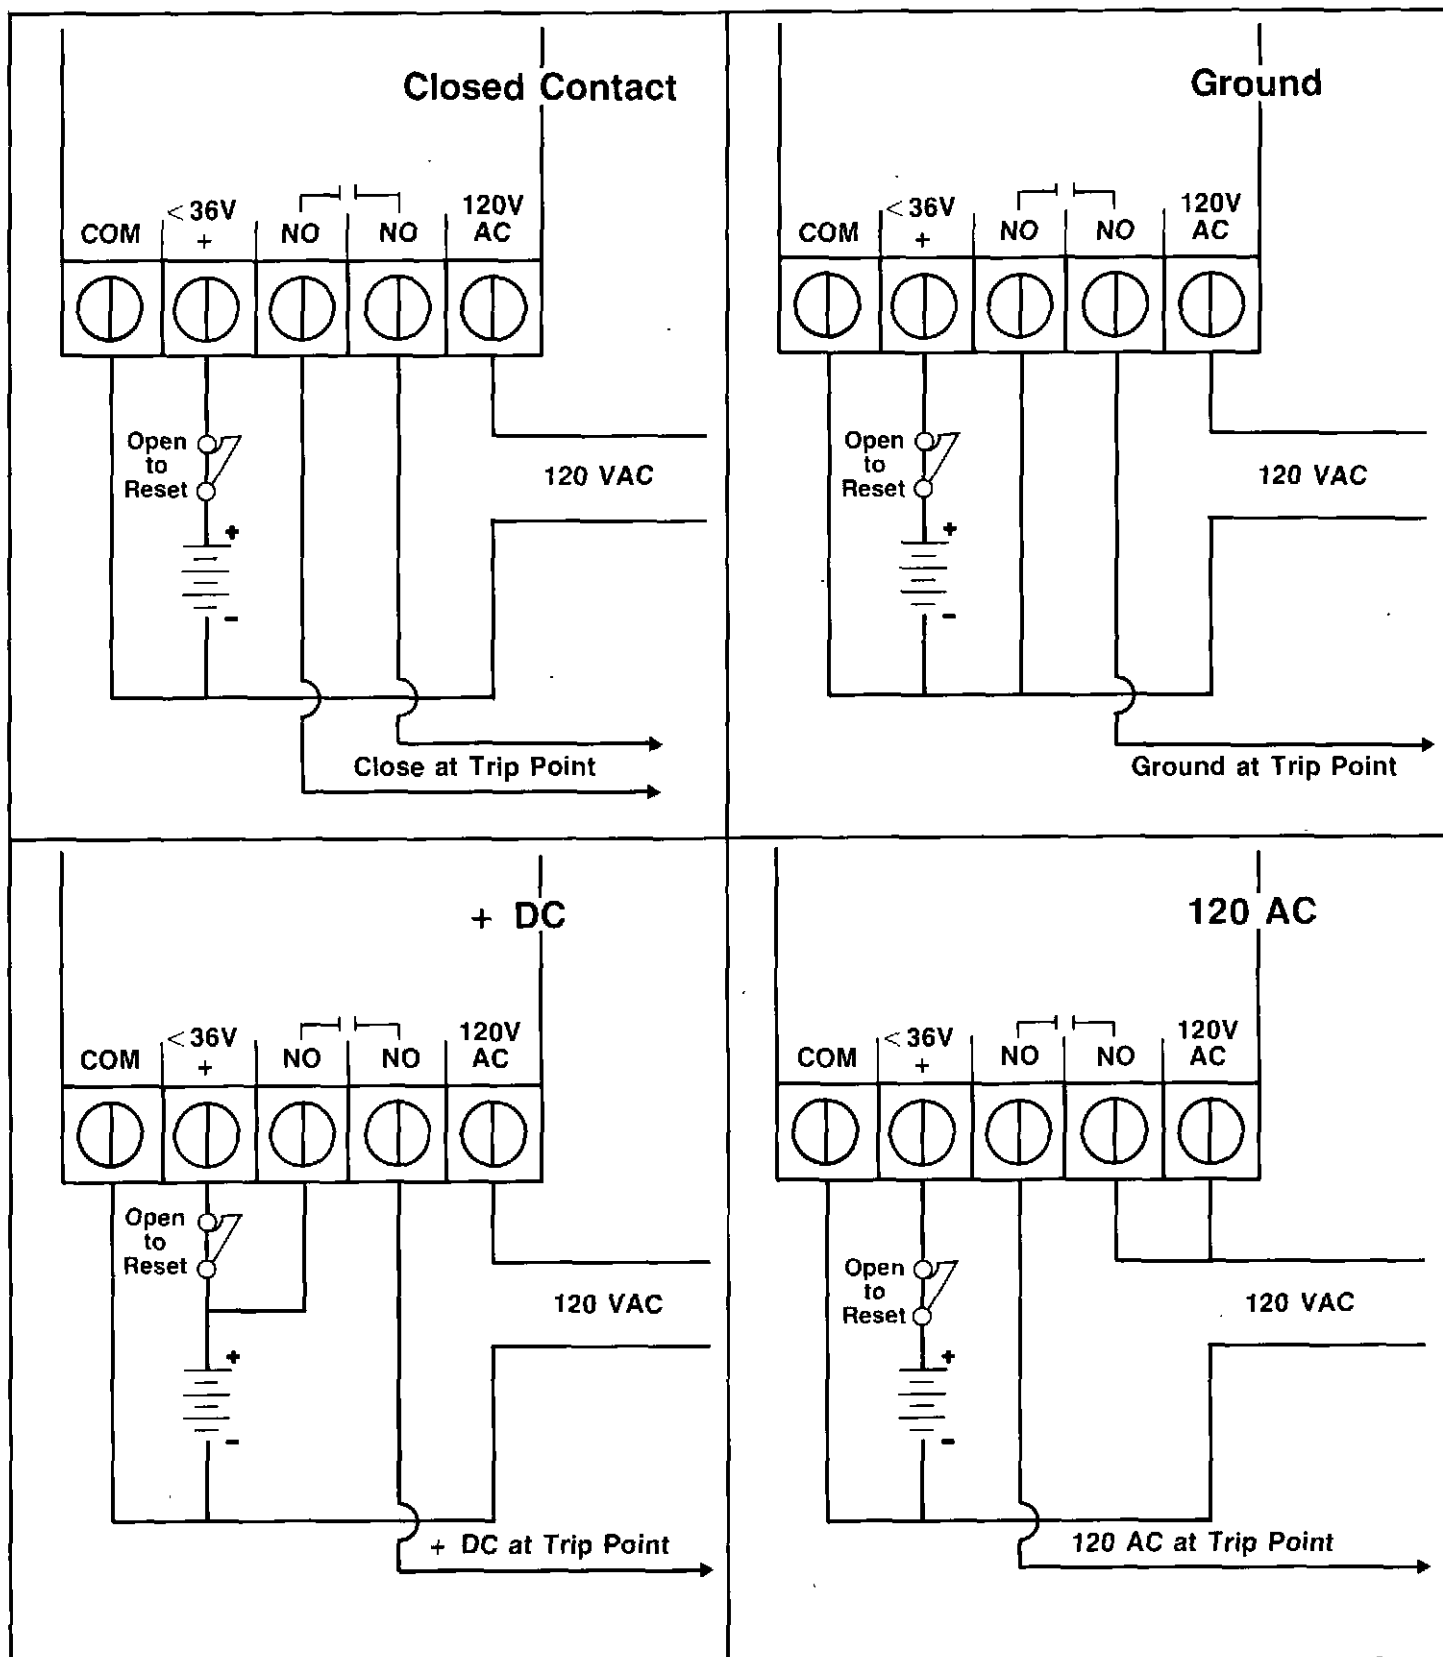

Alternative Applications