

06/24/2008

British Standard Rating per BS 5000

* Voltages refer to wye (star) connection, unless otherwise specified.

MARATHON ELECTRIC GENERATORS

TYPICAL DYNAMIC CHARACTERISTICS







MODEL : 572RSL4025


BASE MODEL: 572RSL4025

Winding H-SG570078

Submittal Data: 480 Volts*, 475.2 kW, 594 kVA, 0.8 P.F., 1800 RPM, 60 Hz, 3 Phase

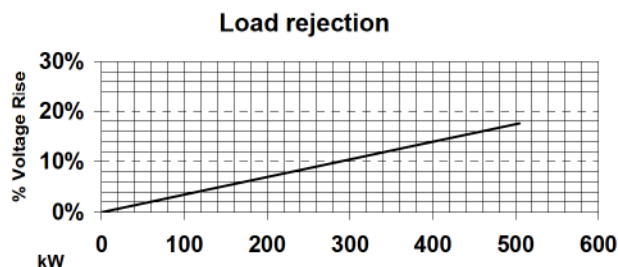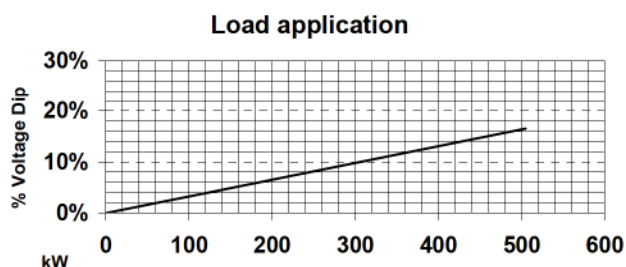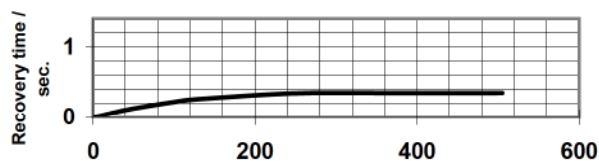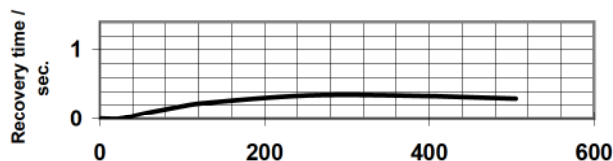

Efficiency at rated voltage and frequency vs. load kW

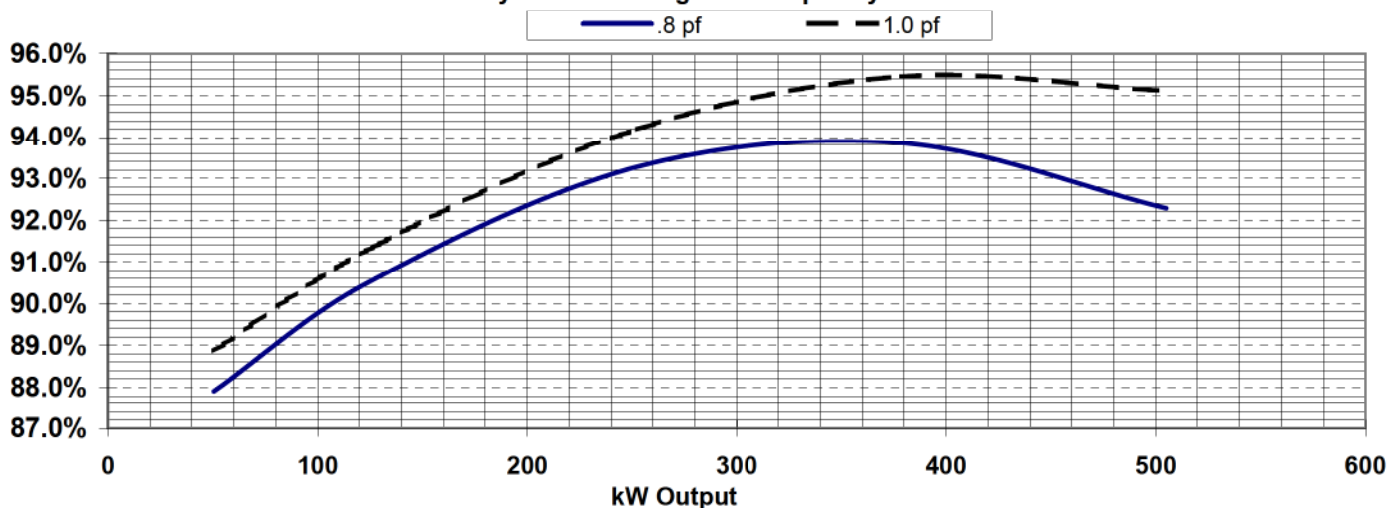

Voltage dip with motor starting

