


SPEED MONITOR


**KATOLIGHT'S
SPEED MONITOR SM12 OR SM24
PROTECTS GENERATOR
SETS AGAINST
ENGINE OVERSPEED**

SPECIFICATIONS

- **Construction:** Epoxy Encapsulated
- **Voltage:** DC 12 V Part #35024 or
24 V Part #35025 (Specify)
- **Sensing:** 120 VAC
- **Accuracy:** $\pm .5$ Hz
- **Operating Trip Point:** 66.5 or 71 Hz (Selectable)
- **Switch Contact Rating:** 2 Amp 120 VAC Resistive
- **Operating Temperature:** -40 to $+70^{\circ}\text{C}$. -40 to $+158^{\circ}\text{F}$.
- **Current Draw:** .07 A max.
- **Mounting:** 2-Holes clearance for #6 screw

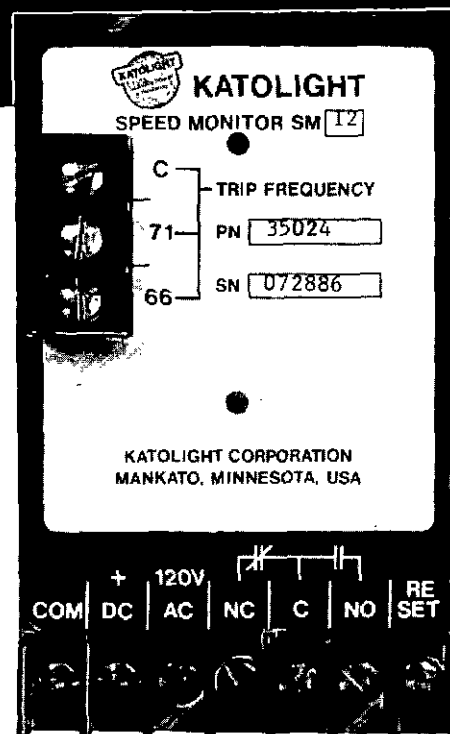

Dimensions




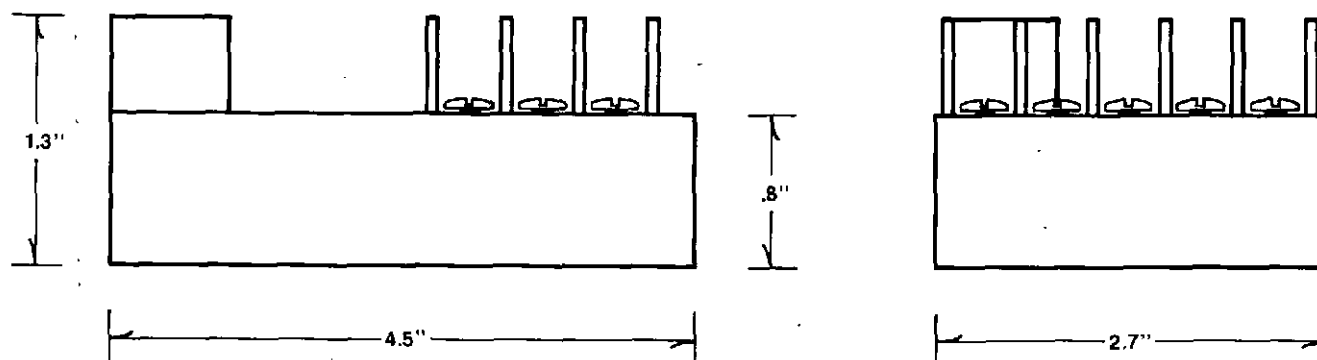


CONTACT:

KATOLIGHT CORPORATION

3201 THIRD AVENUE, P.O. BOX 3229
MANKATO, MN 56002-3229
(507) 625-7973 • TELEX: 29-0787

Dependable Electrical Generating Equipment For Over 35 Years.

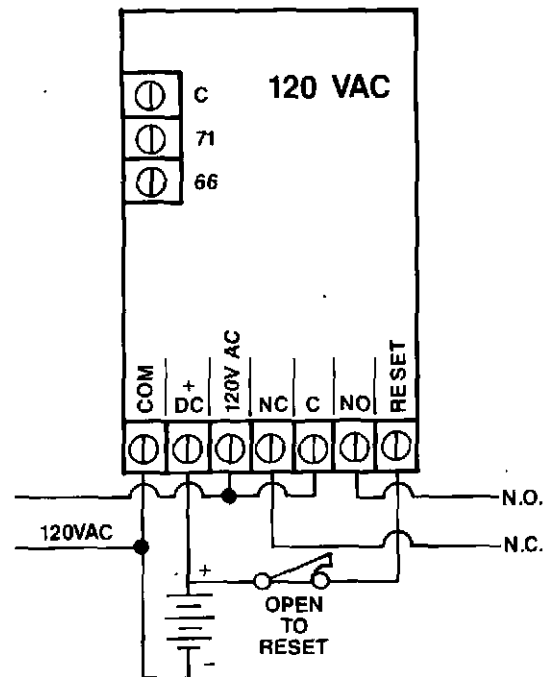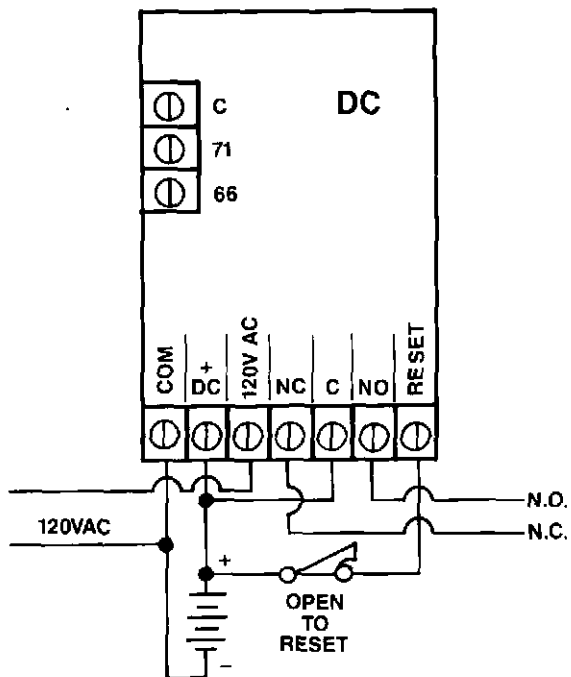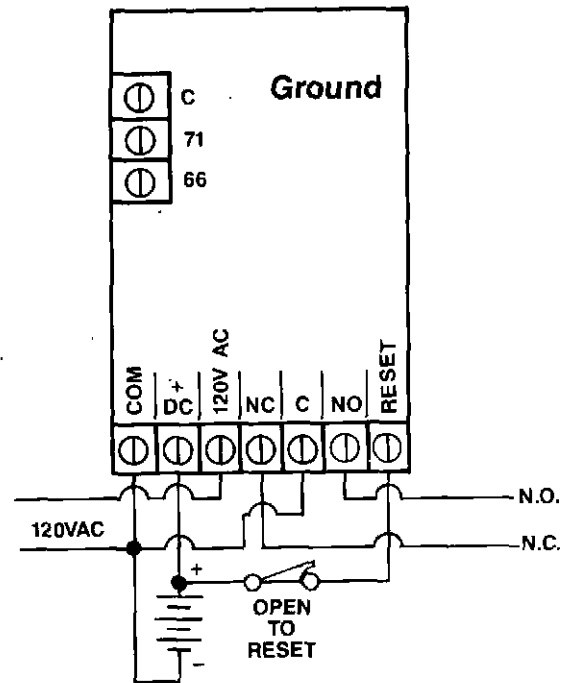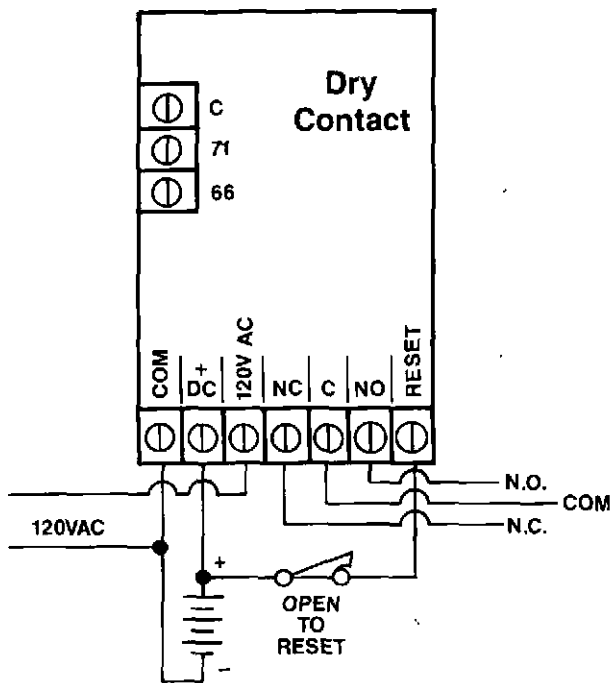

Alternative Applications