



OPTION # 1 C24765 **DUAL VOLTAGE CONTROL TRANSFORMER** PRIMARY: 240 / 480 VAC SECONDARY: 120 VAC

(THIS WIRING ONLY IF OPTION #1 PROVIDED)

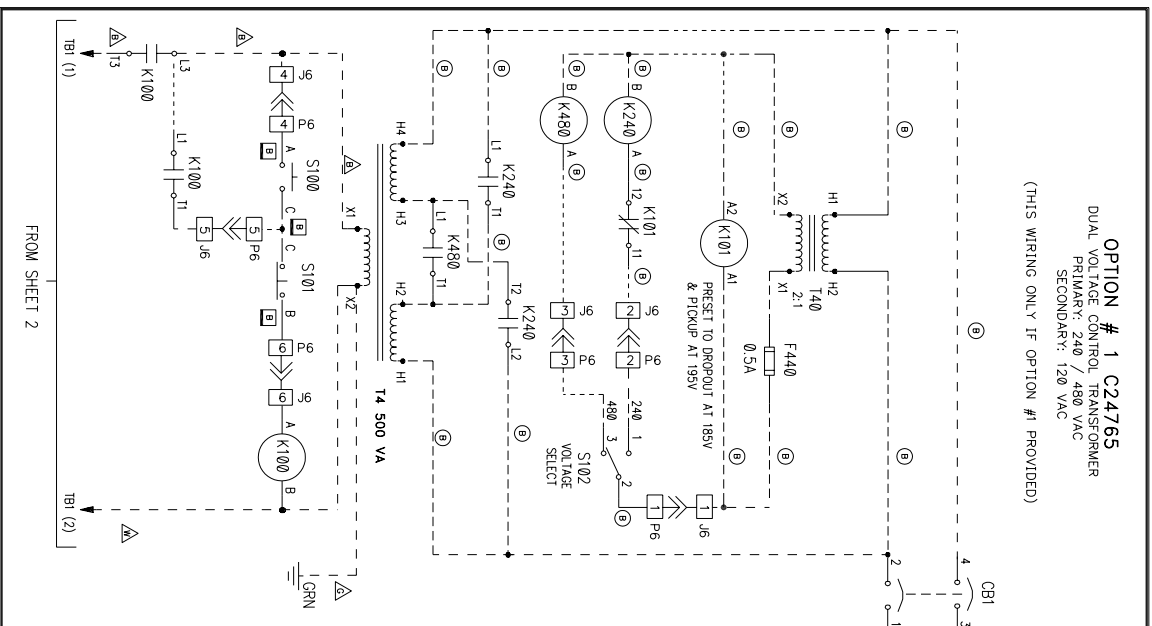

FROM SHEET 1

PH A PH B PH C

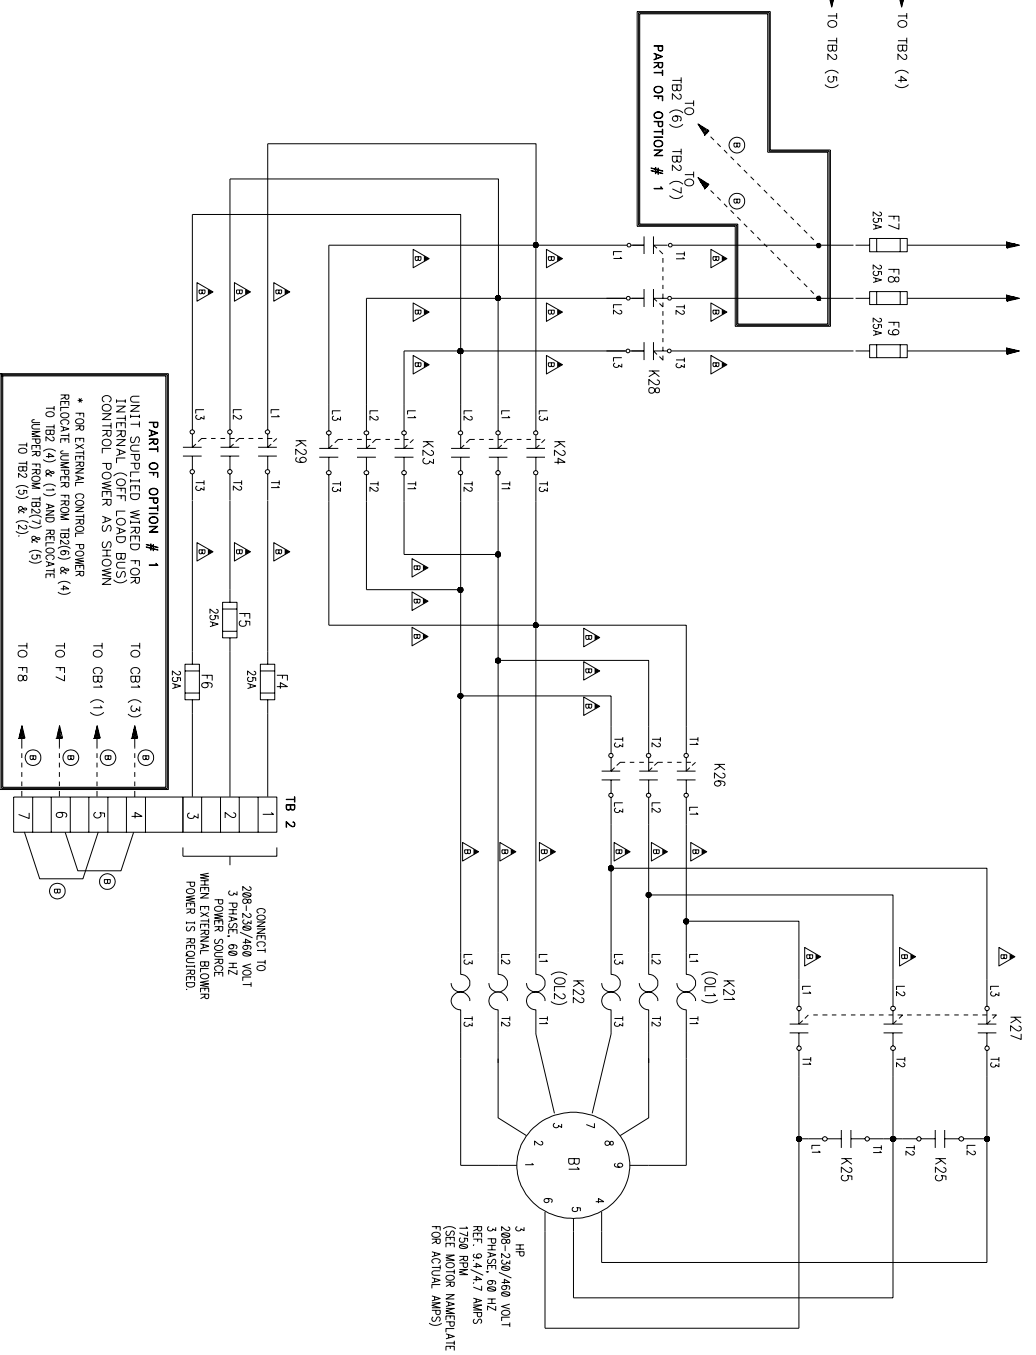

PART OF OPTION # 1
 UNIT SUPPLIED WIRED FOR
 INTERNAL (OFF LOAD BUS)
 CONTROL POWER AS SHOWN
 * FOR EXTERNAL CONTROL POWER
 RELOCATE JUMPER FROM TB(6) & (4)
 TO TB2 (4) & (1) AND RELOCATE
 JUMPER FROM TB(7) & (5)
 TO TB2 (5) & (2).

SEE SHEET 1 FOR WIRE CODE AND NOTES.
 UNLESS OTHERWISE SPECIFIED THE ABOVE NOTES APPLY

SIMILAR TO D26598 SH13

AVTRON MANUFACTURING, INC.		SCHEDULED/INTERCONNECTION	
1986 EXISTING UNIT RELOCATED		DIAGRAM, LOAD BANK	
(400KW @ 240/480V, 3PH)		D30695	
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION		DATE: 10/14/14	
OR PATENT RIGHTS. IT IS TO BE KEPT CONFIDENTIAL		Dwg. No.: D30695	
AND NOT BE LOANED, REPRODUCED, COPIED, OR		REV: E	
OTHERWISE USED FOR MANUFACTURING PURPOSES		SHEET: 3	
WITHOUT THE WRITTEN CONSENT OF AVTRON, INC.			