



DCA220SSVU


WhisperWatt Generator

WhisperWatt 220

Prime Rating: 176 kW (220 kVA)

Standby Rating: 194 kW (242 kVA)

60 Hertz

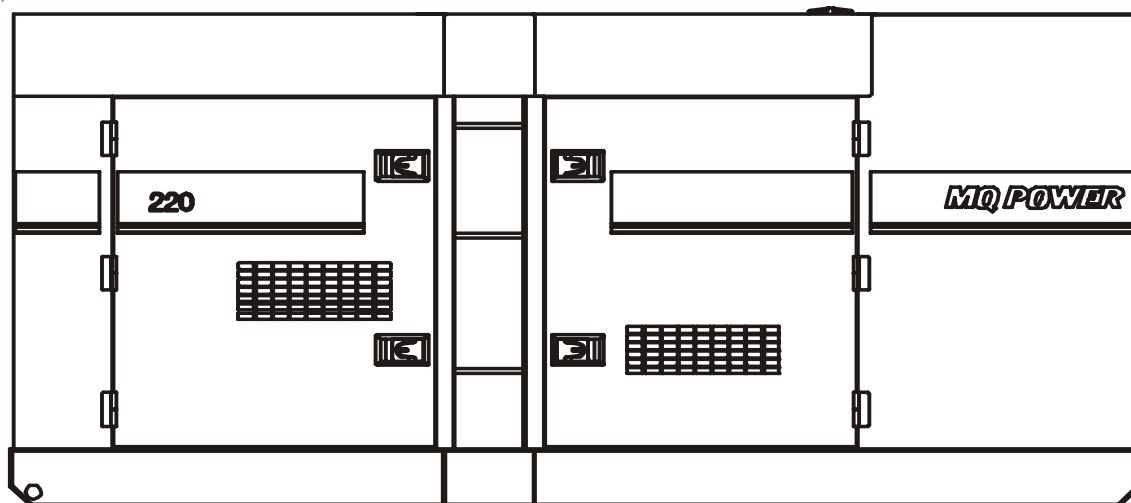

WhisperWatt Standard Features

- **Heavy duty, turbocharged, direct injection, air to air intercooled diesel engine** provides maximum reliability.
- **Brushless alternator** reduces service and maintenance requirements and meets temperature rise standards for Class F insulation systems.
- **Open delta alternator design** provides virtually unlimited excitation for maximum motor starting capability.
- **Automatic voltage regulator (AVR)** provides precise regulation.
- **Electronic governor system** maintains frequency to $\pm 0.25\%$.
- **Full load acceptance** of standby nameplate rating in one step (NFPA 110, para 5-13.2.6).
- **Sound attenuated, weather resistant, steel housing** provides operation at 72 dB(A) at 23 feet. Fully lockable enclosure allows safe unattended operation.
- **Internal fuel tank** with direct reading fuel gauges are standard.
- **Fuel / water separator** removes condensation from fuel for extended engine life.
- **Seven-stage powder coat paint** provides durability and weather protection.
- **EPA-MOH emissions certified.**
- **Complete engine analog instrumentation** includes DC ammeter, oil pressure gauge, water temp. gauge, fuel level gauge, tachometer/hour meter, preheat indicator, manual engine speed control, and emergency shutdown monitors.
- **Complete generator analog instrumentation** includes voltage regulator control, ammeter phase selector switch, voltmeter phase selector switch, AC voltmeter, AC ammeter, frequency meter, panel light, and circuit breaker.
- **Automatic safety shutdown system** monitors the water temperature, engine oil pressure, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- **Low coolant level shutdown system** provides protection from critically low coolant levels. Includes control panel warning light.
- **Auto start/stop control** allows generator to start automatically in the event of a commercial power failure.
- **Complete power panel.** Fully covered; three-phase terminals and single phase receptacles allow fast and convenient hookup for most applications including temporary power boxes, tools and lighting equipment. All are NEMA standard.
- **Simultaneous single and three phase power.**
- **Voltage selector switch** allows easy to change voltages as your applications require. 240/480 Buss Bar.



DCA220SSVU

WhisperWatt Generator

Specifications

Generator	
Design	Revolving field, Self-ventilated Drip-proof, Single bearing
No. of Poles	4-pole
Excitation	Brushless with AVR
Standby Output	194 KW (242 KVA)
Prime Output	176 KW (220 KVA)
Generator RPM	1800
Voltage — 3Ø	208, 220, 240, 416, 440, 480V
Voltage — 1Ø	120, 127, 139, 240, 254, 277V
Armature Connection	Star with neutral
Voltage Regulation (No load to full load)	1.0%
Power Factor	0.8
Frequency	60 Hz
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load
Insulation	Class F
Sound Level dB(A) Full load at 23 feet	72

Cooling	
Fan Load	11 HP (8 KW)
Coolant Capacity (with radiator)	7.8 gallons (37 liters)
Coolant Flow Rate (per minute)	64.9 gallons (246 liters)
Heat Rejection to Coolant (per minute)	6,256 Btu (6.6 MJ)
Heat Rejection to Engine (per minute)	853 Btu (0.9 MJ)
Maximum Coolant Friction Head	3.9 psi (27 kPa)
Maximum Coolant Static Head	16.74 feet (5.1 meters)
Ambient Temperature Rating	95°F (35°C)

Air	
Combustion Air	650 cfm (18.4 m³/min)
Maximum Air Cleaner Restriction	20 in. H²O (5.0 kPa)
Alternator Cooling Air	1,459 cfm (41.3 m³/min)
Radiator Cooling Air	19,670 cfm (570 m³/min)
Minimum Air Opening to Room	34.4 sq.ft (3.2 sq.m)
Minimum Discharge Opening	6.67 sq.ft (0.62 sq.m)

Engine	
Make / Model	Volvo / TAD741GE
Emissions	EPA Tier 2 Certified
Starting System	Electric
Design	4-cycle Water Cooled Direct Injection Turbocharged Air to Air Intercooled
Displacement	7280 cc
No. cylinders	6
Bore x Stroke (mm)	107 x 135
Gross Engine Power Output	316 bhp (235.6 kW)
BMEP	286 psi (1970 kPa)
Piston Speed	1596 ft./min. (8.11 m/s)
Compression Ratio	19.5 : 1
Engine Speed	1800 rpm
Overspeed Limit	2100 rpm
Oil capacity gallons (liters)	7.6 (29)
Battery	12V 150Ah x 2 (24V System)

Exhaust	
Gas Flow (full load)	1,624 cfm (46.0 m³/min)
Gas Temperature	921°F (489°C)
Maximum Back Pressure	40 in. H²O (10 kPa)

Maximum Amps	
Rated Voltage	Maximum Amps
1Ø 120 Volt	488.9 amps (4 wire)
1Ø 240 Volt	244.4 amps (4 wire)
3Ø 240 Volt	529 amps
3Ø 480 Volt	264 amps

Fuel	
Maximum Fuel Flow (per hour)	145 gallons (549 liters)
Maximum Inlet Restriction (Hg)	4.8 in. (222 mm)
Fuel Tank Capacity	129 gallons (490 liters)
Fuel Consumption	12.6 (47.8)
At full load gph (lph)	9.7 (36.7)
At 3/4 load gph (lph)	7.0 (26.5)
At 1/2 load gph (lph)	4.3 (16.2)
At 1/4 load gph (lph)	

Warranty*

Volvo Engine

24 months from date of purchase and unlimited hours.

*Refer to the express written, Engine warranty sheet for additional coverage information.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

*Refer to the express written, one-year limited warranty sheet for additional information.


Backfeed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device.

Specifications are subject to change without notice.



DCA220SSVU

WhisperWatt Generator

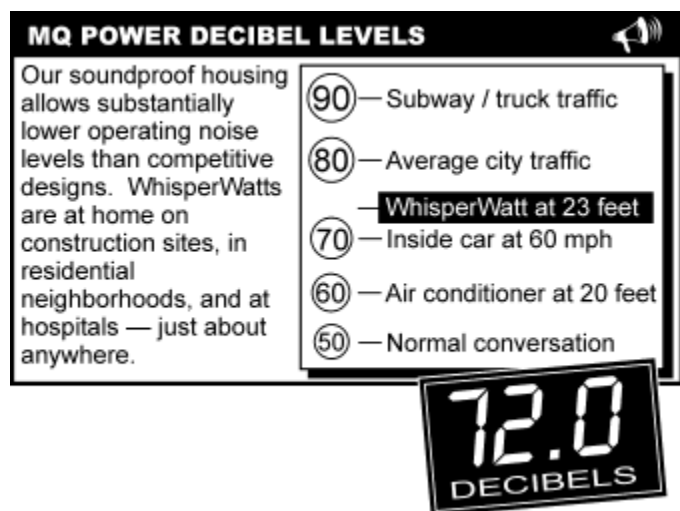

Optional Generator Features

- ☐ **Battery charger** — provides fully automatic and self-adjusting charging to the generator's battery system.
- ☐ **Jacket water heater** — for easy starting in cold weather climates.
- ☐ **Special batteries** — long life batteries provide extra engine cranking power.
- ☐ **Spring Isolators** — provides extra vibration protection for standby applications.
- ☐ **Trailer mounted package** — highway legal trailer with electronic or surge brakes with single, double, or triple axle configuration. Extra capacity fuel tanks are also available.

Optional Output Connections

- ☐ **Cam-Loks** — provides quick disconnect alternative to bolt-on connectors.
- ☐ **Pin and Sleeve Connectors** — provides industry standard connectors for all voltage requirements.
- ☐ **Output cable** — available in any custom length and size configuration.

Optional Control Features

- ☐ **Audible alarm** — alerts operator of abnormal conditions.
- ☐ **Emergency stop switch.**

Optional Fuel Cell Features



- ☐ **Trailer fuel tank** — a second fuel cell located in the trailer allows for extended run time.
- ☐ **Subbase fuel cells (double wall)** — Additional fuel cell for extended runtime operation. Contains a leak sensor, low fuel level switch, and a secondary containment tank. UL142 listed.
 - ☐ 12 hours of minimum run time.
 - ☐ 24 hours of minimum run time.




DCA220SSVU

WhisperWatt Generator

Dimensions

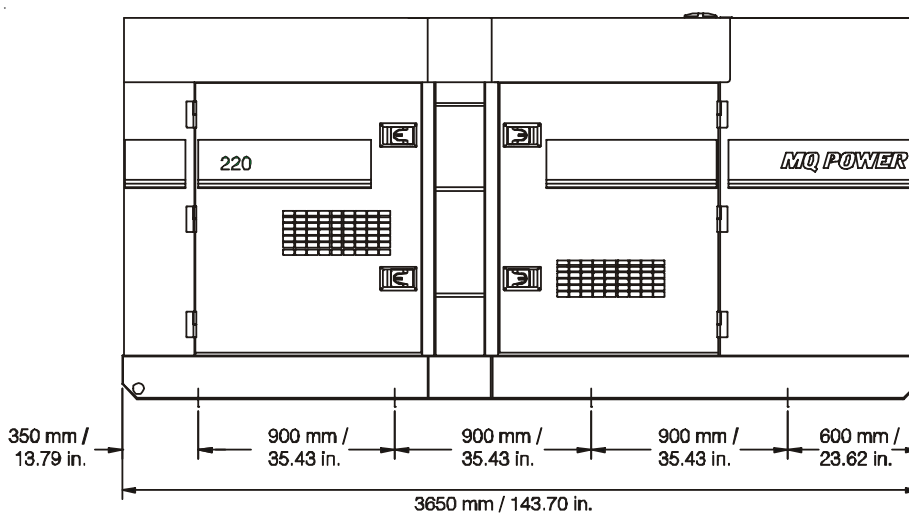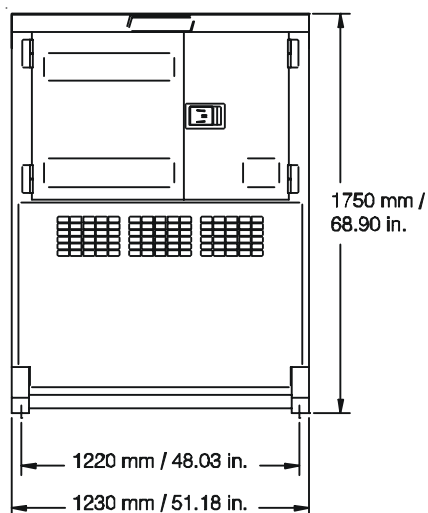

Weight	
Dry Weight	7696 lbs. (3490 kg)
Wet Weight	8600 lbs. (3900 kg)

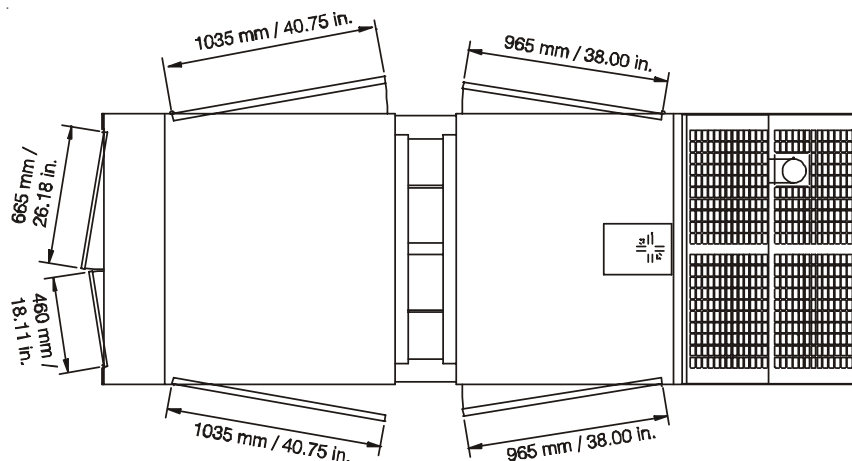

Manufactured by Denyo Co.

Your MQ Power dealer is:



MQ POWER
POST OFFICE BOX 6254
CARSON, CA 90749
310-537-3700 • 800-883-2551
FAX: 310-604-3831
E-MAIL: mqpower@multiquip.com
WWW: mqpower.com