



DCA300SSK


WhisperWatt Generator

WhisperWatt™ 300

Prime Rating: 240 kW (300 kVA)

Standby Rating: 264 kW (330 kVA)

60 Hertz

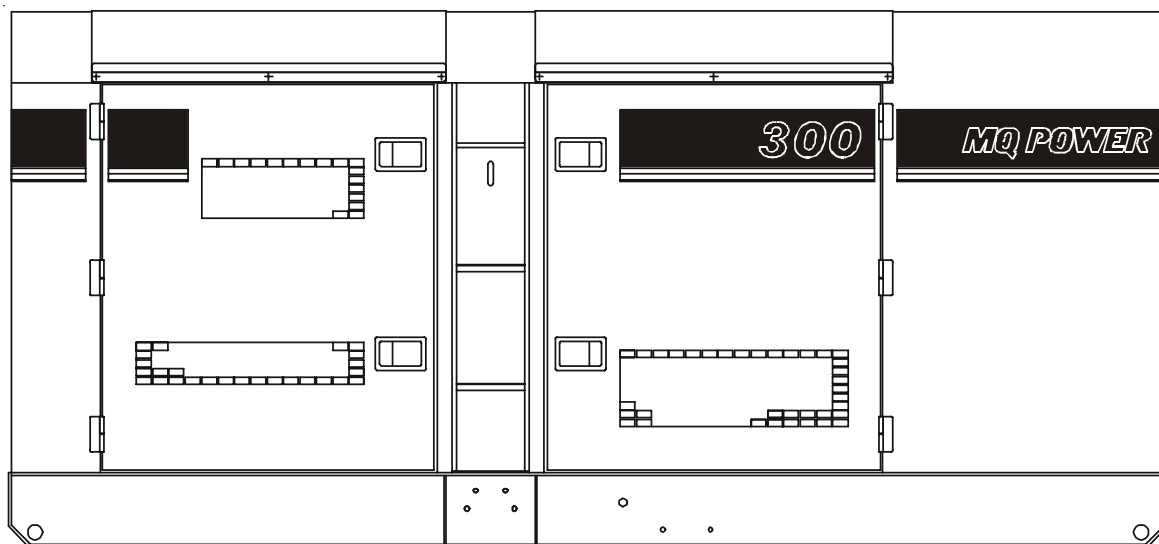

WhisperWatt™ Standard Features

- **Heavy duty, turbocharged, direct injection diesel engine** provides maximum reliability.
- **Brushless alternator** reduces service and maintenance requirements and meets temperature rise standards for Class F insulation systems.
- **Open delta alternator design** provides virtually unlimited excitation for maximum motor starting capability.
- **Automatic voltage regulator (AVR)** provides precise regulation.
- **Electronic governor system** maintains frequency to $\pm 0.25\%$.
- **Full load acceptance** of standby nameplate rating in one step (NFPA 110, para 5-13.2.6).
- **Sound attenuated, weather resistant, steel housing** provides operation at 71 dB(A) at 23 feet. Fully lockable enclosure allows safe unattended operation.
- **Internal fuel tank** with direct reading fuel gauges are standard.
- **Seven-stage powder coat paint** provides durability and weather protection.
- **EPA-MOH emissions certified.**
- **Complete engine analog instrumentation** includes DC ammeter, oil pressure gauge, water temp. gauge, tachometer/hour meter, preheat indicator, manual engine speed control, emergency shutdown monitors, and emergency stop button.
- **Complete generator analog instrumentation** includes voltage regulator control, ammeter phase selector switch, voltmeter phase selector switch, AC voltmeter, AC ammeter, frequency meter, panel light, and circuit breaker.
- **Automatic safety shutdown system** monitors the water temperature, engine oil pressure, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- **Auto start/stop control** allows generator to start automatically in the event of a commercial power failure.
- **Complete power panel.** Fully covered; three-phase terminals and single phase receptacles allow fast and convenient hookup for most applications including temporary power boxes, tools and lighting equipment. All are NEMA standard.
- **Simultaneous single and three phase power.**
- **Emergency stop switch.**



DCA300SSK

WhisperWatt Generator

Specifications

Generator	
Design	Revolving field Self-ventilated Drip-proof Single bearing
No. of Poles	4-pole
Excitation	Brushless with AVR
Standby Output	264 KW (330 KVA)
Prime Output	240 KW (300 KVA)
Generator RPM	1800
Voltage — 3Ø	208, 220, 240, 416, 440, 480V Reconnectable
Voltage — 1Ø	120, 127, 139, 240, 254, 277V Adjustable
Armature Connection	Star with neutral
Voltage Regulation (No load to full load)	±1.5%
Power Factor	0.8
Frequency	60 Hz
Frequency Regulation: No load to full load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	+0.25% of mean value for constant loads from no load to full load
Insulation	Class F
Sound Level dB(A) Full load at 23 feet	71

Engine	
Make / Model	Komatsu / SA6D125E
Emissions	EPA Tier 2 Compliant
Starting System	Electric
Design	Direct Injection Turbocharged Aftercooled
Displacement	11,000 cc
No. cylinders	6
Bore x Stroke (mm)	140 x 165
Gross Engine Power Output	431 bhp (295 kWm) Standby 359 bhp (268 kWm) Prime
BMEP	281 psi (1937 kPa) 255 psi (1758 kPa)
Piston Speed	1772 ft./min. (9.0 m/s)
Compression Ratio	17:1
Engine Speed	1800 rpm
Overspeed Limit	2100 rpm
Oil capacity gallons (liters)	16.1 (60.9)
Battery	12V 200Ah x 2 (24V System)

Fuel	
Maximum Fuel Flow (per hour)	19.3 gallons (73 liters)
Maximum Inlet Restriction (Hg)	0.4 in. (9.8 mm)
Maximum Return Restriction (Hg)	3.9 in. (98.0 mm)
Fuel Tank Capacity	129.5 gallons (490 liters)
Fuel Consumption	
At full load gph (lph)	17.5 (63.2)
At 3/4 load gph (lph)	12.0 (47.6)
At 1/2 load gph (lph)	8.8 (32.1)
At 1/4 load gph (lph)	5.5 (19.0)

Cooling	
Fan Load	9.4 HP (7.0 KW)
Coolant Capacity (with radiator)	9.8 gallons (37.0 liters)
Coolant Flow Rate (per minute)	79.0 gallons (300.0 liters)
Heat Rejection to Coolant (per minute)	8720 Btu (9.2 MJ) Standby 8151 Btu (8.6 MJ) Prime
Heat Radiated to Room (per minute)	2114 Btu (2.23 MJ) Standby 1972 Btu (2.08 MJ) Prime
Maximum Coolant Friction Head	5.0 psi (34.4 kPa)
Maximum Coolant Static Head	46 feet (14 meters)
Ambient Temperature Rating	95°F (35°C)

Air	
Combustion Air	773 cfm (22 m³/min) Standby 717 cfm (20 m³/min) Prime
Maximum Air cleaner Restriction	30 in. H ₂ O (7.0 kPa)
Alternator Cooling Air	2797 cfm (79.0 m³/min)
Radiator Cooling Air	9887 scfm (280 m³/min)
Minimum Air Opening to Room	27.0 sq.ft (2.5 sq.m)
Minimum Discharge Opening	10.0 sq.ft (1.0 sq.m)

Exhaust	
Gas Flow (full load)	1942 cfm (55 m³/min) Standby 1801 cfm (51 m³/min) Prime
Gas Temperature	876 °F (469 °C) Standby 788 °F (420 °C) Prime
Maximum Back Pressure	40 in. H ₂ O (10 kPa)

Maximum Amps	
Rated Voltage	Maximum Amps
1Ø 120 Volt	666.7 amps (4 wire)
1Ø 240 Volt	333.3 amps (4 wire)
3Ø 240 Volt	721.7 amps
3Ø 480 Volt	360.8 amps

Warranty*

Komatsu Engine

12 months from date of purchase or 1000 hours (whichever occurs first).

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

*Refer to the express written, one-year limited warranty sheet for additional information.

Backfeed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device.
Specifications are subject to change without notice.



DCA300SSK

WhisperWatt Generator

MQ POWER DECIBEL LEVELS



Our soundproof housing allows substantially lower operating noise levels than competitive designs. WhisperWatts are at home on construction sites, in residential neighborhoods, and at hospitals — just about anywhere.

- (90) — Subway / truck traffic
- (80) — Average city traffic
- (70) — Inside car at 60 mph
- (60) — Air conditioner at 20 feet
- (50) — Normal conversation

WhisperWatt at 23 feet

69.0
DECIBELS

Optional Generator Features

- ☐ **Battery charger** — provides fully automatic and self-adjusting charging to the generator's battery system.
- ☐ **Low coolant level shutdown** — provides protection from critically low coolant levels. Includes control panel warning light.
- ☐ **Jacket water heater** — for easy starting in cold weather climates.
- ☐ **Special batteries** — long life batteries provide extra engine cranking power.
- ☐ **Spring Isolaters** — provides extra vibration protection for standby applications.
- ☐ **Fuel / water separators** — removes condensation from fuel for extended engine life.
- ☐ **Trailer mounted package** — highway legal trailer with electric or surge brakes with triple axle configuration. Extra capacity fuel tanks are also available.

Optional Control Features

- ☐ **Remote speed adjust rheostat** — allows for engine speed adjustment from the control panel.
- ☐ **Audible alarm** — alerts operator of abnormal conditions.

Optional Fuel Cell Features

- ☐ **Trailer fuel tank** — a second fuel cell located in the trailer allows for extended run time.
- ☐ **Subbase fuel cells (double wall)** — Additional fuel cell for extended runtime operation. Contains a leak sensor, low fuel level switch, and a secondary containment tank. UL142 listed.
 - ☐ 12 hours of minimum run time.
 - ☐ 24 hours of minimum run time.

Optional Output Connections



- ☐ **Cam-Loks** — provides quick disconnect alternative to bolt-on connectors.
- ☐ **Pin and Sleeve Connectors** — provides industry standard connectors for all voltage requirements.
- ☐ **Output cable** — available in any custom length and size configuration.




DCA300SSK

WhisperWatt Generator

Dimensions

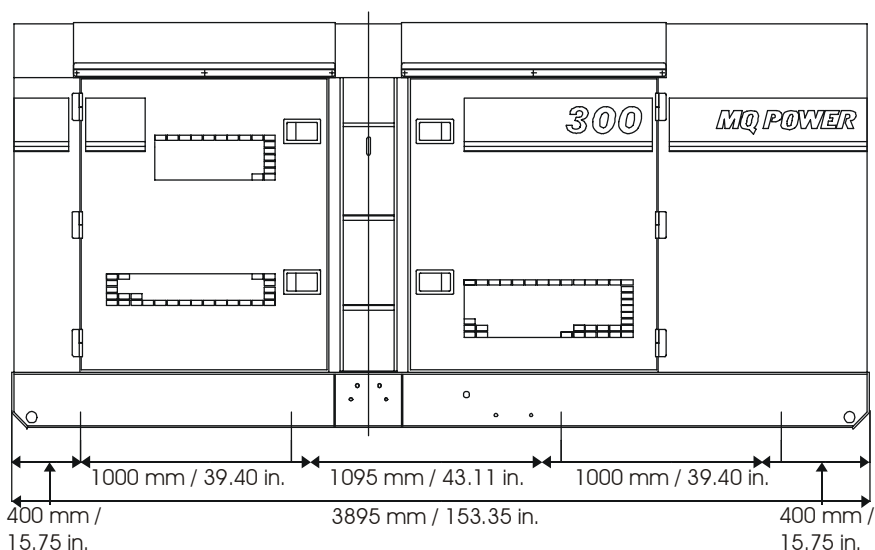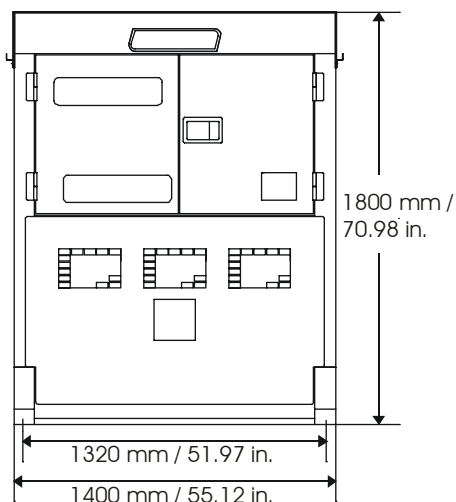

Weight	
Dry Weight	9413.64 lbs. (4270 kg)
Wet Weight	10582.08 lbs. (4800 kg)

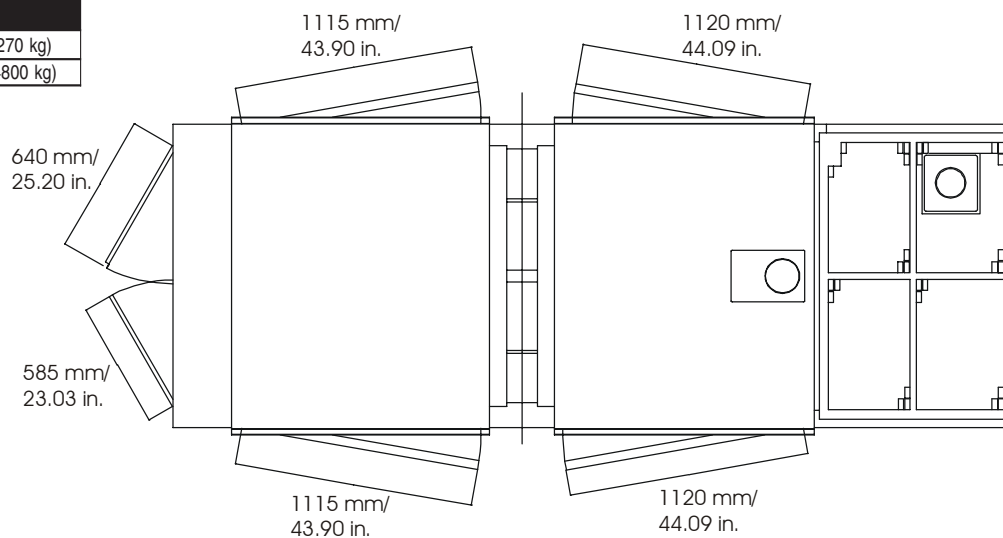

Units mfg. by Denyo Mfg. Corp.

Your MQ Power dealer is:



MQ POWER
POST OFFICE BOX 6254
CARSON, CA 90749
310-537-3700 • 800-421-1244
FAX: 310-632-2656
E-MAIL: mq@multiquip.com
WEBSITE: www.mqpower.com