



DCA45USIXF


Ultra-Silent Series

WhisperWatt™ 45

Prime Rating: 36 kW (45 kVA)

Standby Rating: 37.8 kW (47.3 kVA)

60 Hertz

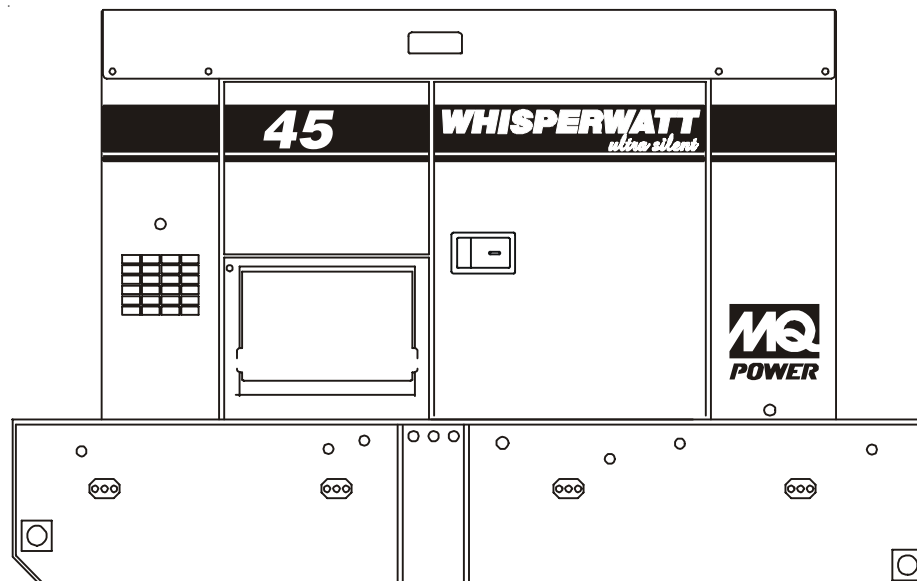

WhisperWatt™ Standard Features

- **Heavy duty, 4-cycle, direct injection, turbocharged diesel engine** provides maximum reliability.
- **Brushless alternator** reduces service and maintenance requirements and meets temperature rise standards for Class F insulation systems.
- **Open delta alternator design** provides virtually unlimited excitation for maximum motor starting capability.
- **Automatic voltage regulator (AVR)** provides precise regulation.
- **Full load acceptance** of standby nameplate rating in one step (NFPA 110, para 5-13.2.6).
- **Sound attenuated, weather resistant, steel housing** provides ultra-silent operation at 57 dB(A) at 23 feet. Fully lockable enclosure allows safe unattended operation.
- **Integrated fuel tank** with direct reading fuel gauges are standard.
- **Seven-stage powder coat paint** provides durability and weather protection.
- **EPA-MOH emissions certified** - Tier 2 emissions compliant.
- **Complete engine analog instrumentation** includes DC ammeter, oil pressure gauge, water temp. gauge, fuel level gauge, tachometer/hour meter, preheat indicator, emergency shutdown monitors, and keyed start switch.
- **Complete generator analog instrumentation** includes voltage regulator control, ammeter phase selector switch, voltmeter phase selector switch, AC voltmeter, AC ammeter, frequency meter, panel light, and circuit breaker.
- **Automatic safety shutdown system** monitors the engine oil pressure and water temperature. Warning lights indicate abnormal conditions.
- **Complete power panel.** Fully covered; three-phase terminals and single phase receptacles allow fast and convenient hookup for most applications including temporary power boxes, tools and lighting equipment. All are NEMA standard.
- **Simultaneous single and three phase power.**
- **Voltage selector switch** allows easy to change voltages as your applications require.
- **Fuel / water separators** — removes condensation from fuel for extended engine life. Panel mounted alarm light included.



DCA45USIXF

Ultra-Silent Series

Specifications

Generator	
Design	Revolving field Self-ventilated Drip-proof Single bearing
No. of Poles	4-pole
Excitation	Brushless with AVR
Standby Output	37.8 KW (47.3 KVA)
Prime Output	36 KW (45 KVA)
Generator RPM	1800
Voltage — 3Ø	208, 220, 240, 416, 440, 480V Switchable
Voltage — 1Ø	120, 127, 139, 240, 254, 277V Switchable
Armature Connection	Star with neutral / Zig Zag
Voltage Regulation (No load to full load)	±1.0%
Power Factor	0.8
Frequency	60 Hz
Frequency Regulation: No Load to Full Load	3~5% under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.5% of mean value for constant loads from no load to full load.
Insulation	Class F
Sound Level dB(A) Full load at 23 feet	57

Engine	
Make / Model	Isuzu / BB-4JG1T
Emissions	EPA Tier 2 Certified
Starting System	Electric
Design	4-cycle Water cooled Direct injection Turbocharged
Displacement	186.7 in ³ (3059 cc)
No. cylinders	4
Bore x Stroke (mm)	95.4 x 107
Gross Engine Power Output	64.8 bhp (48.3 kWm)
BMEP	134 psi (924 kPa)
Piston Speed	1264 ft./min. (6.42 m/s)
Compression Ratio	18:1
Engine Speed	1800 rpm
Overspeed Limit	2100 rpm
Oil Capacity	2.64 gallons (10 liters)
Battery	12V 72Ah x 1

Fuel		
Maximum Fuel Flow (per hour)	11.9 gallons (45.2 liters)	
Maximum Inlet Restriction (Hg)	2.39 in. (61 mm)	
Fuel Tank Capacity	198 gallons (751 liters)	
Fuel Consumption	gph	lph
At full load	2.6	9.84
At 3/4 load	1.97	7.47
At 1/2 load	1.43	5.21
At 1/4 load	0.87	3.30

Cooling	
Fan Load	0.27 HP (0.2 KW)
Coolant Capacity (with radiator)	3.6 gallons (13.7 liters)
Coolant Flow Rate (per minute)	21.1 gallons (80 liters)
Heat Rejection to Coolant (per minute)	1668 Btu (1.76 MJ)
Heat Radiated to Room (per minute)	246.4 Btu (0.26 MJ)
Maximum Coolant Friction Head	6.4 psi (44.1 kPa)
Maximum Coolant Static Head	6.56 feet (2.0 meters)
Ambient Temperature Rating	104°F (40°C)

Air	
Combustion Air	82.6 cfm (2.34 m ³ /min)
Maximum Air Cleaner Restriction	25.0 in. H ₂ O (6.2 kPa)
Alternator Cooling Air	565 cfm (16 m ³ /min)
Radiator Cooling Air	1472.5 cfm (41.7 m ³ /min)
Minimum Air Opening to Room	4.84 sq.ft (0.45 sq.m)
Minimum Discharge Opening	2.37 sq.ft (0.22 sq.m)

Exhaust	
Gas Flow (full load)	175 cfm (4.97 m ³ /min)
Gas Temperature	860°F (460°C)
Maximum Back Pressure	53.5 in. H ₂ O (13.3 kPa)

Size	
L x W x H inches (cm)	105.9 x 37.4 x 70.1 (269 x 95 x 178)
Approx. Net Dry Weight	3627 lbs. (1645 kg)

Maximum Amps	
Rated Voltage	Maximum Amps
1Ø 120 Volt	100 amps (4 wire)
1Ø 240 Volt	50 amps (4 wire)
3Ø 240 Volt	108 amps
3Ø 480 Volt	54 amps

Warranty*

Isuzu Engine

12 months from date of purchase with unlimited hours or 24 months from date of purchase with 2000 hours (whichever occurs first).

Generator

24 months from date of purchase or 2000 hours (whichever occurs first).

*Refer to the express written, one-year limited warranty sheet for additional information.

Backfeed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device.

Specifications are subject to change without notice.



DCA45USIXF

Ultra-Silent Series

MQ POWER DECIBEL LEVELS



Our soundproof housing allows substantially lower operating noise levels than competitive designs. Ultra-Silent are at home on construction sites, in residential neighborhoods, and at hospitals — just about anywhere.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 20 feet
- Ultra-Silent at 23 feet
- 50 — Normal conversation

57.0
DECIBELS

Ultra-Silent Features

- ☐ **Low Noise Muffler**— Large capacity low noise muffler minimizes exhaust sound.
- ☐ **Soundproof Casing**— The new design divides the cabinet into three sections, separating the engine, muffler and radiator for more efficient cooling and reduces noise from the engine and fans.
- ☐ **New Cooling System**— An advanced design uses two separate air intake systems to cool the generator. The engine fan draws air in to cool the engine and generator housing while a second electric fan directly cools the radiator. With less air being drawn into the generator through each fan, considerably less noise is produced through the top of the generator.
- ☐ **Environmental Design** — Constructed using an integrated environmental skid and fuel tank. This design fully contains fuel leakage and any liquid that might leak from the engine such as lube oil or radiator coolant. All potentially hazardous liquids are contained without contaminating the surrounding area.

Optional Control Features


- ☐ **Emergency Stop Switch.**
- ☐ **Audible Alarm** — alerts operator of abnormal conditions.
- ☐ **Automatic Start / Stop Control** — automatically starts the generator set during a commercial power failure when used in conjunction with a transfer switch.

Optional Generator Features

- ☐ **Electronic Governor Control (Crystal Sync)** — maintains frequency to within $\pm 0.25\%$ from no load to full load.
- ☐ **Battery Charger** — provides fully automatic and self-adjusting charging to the generator's battery system.
- ☐ **Jacket Water Heater** — for easy starting in cold weather climates.
- ☐ **Special Batteries** — long life batteries provide extra engine cranking power.
- ☐ **Spring Isolators** — provides extra vibration protection for standby applications.
- ☐ **Low Coolant Level Shutdown** — provides protection from critically low coolant levels. Includes control panel warning light.
- ☐ **Trailer Mounted Package** — highway legal trailer with electronic or surge brakes with tandem axle configuration.

Optional Distribution Devices

- ☐ **Cam-Lock connectors.**
- ☐ **Pin & Sleeve Connectors.**
- ☐ **AC Output Cable.**

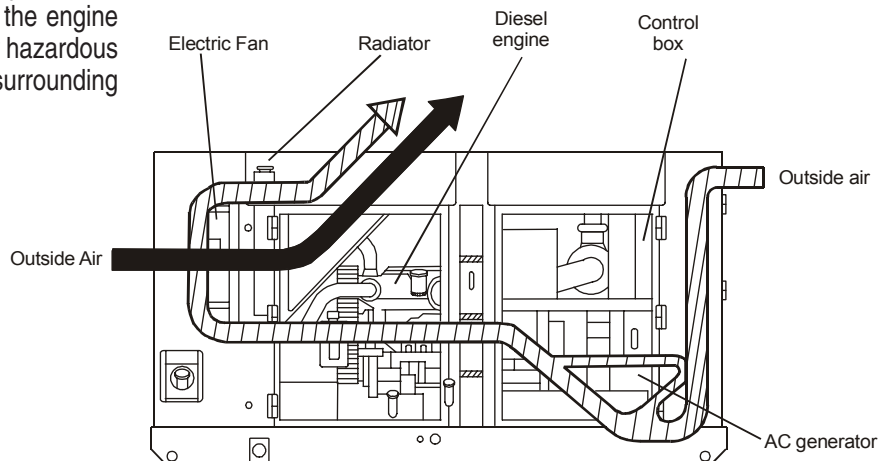



Flow of Cooling Air




DCA45USIXF

Ultra-Silent Series

Dimensions

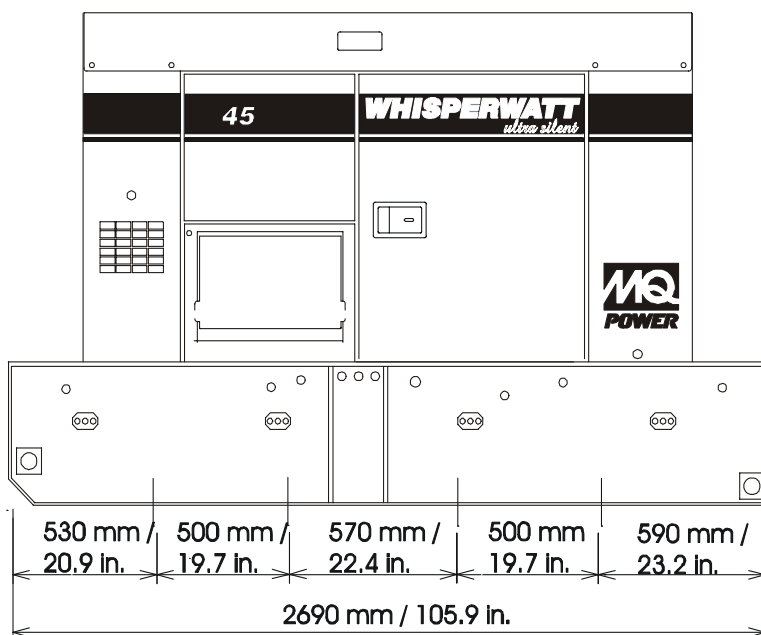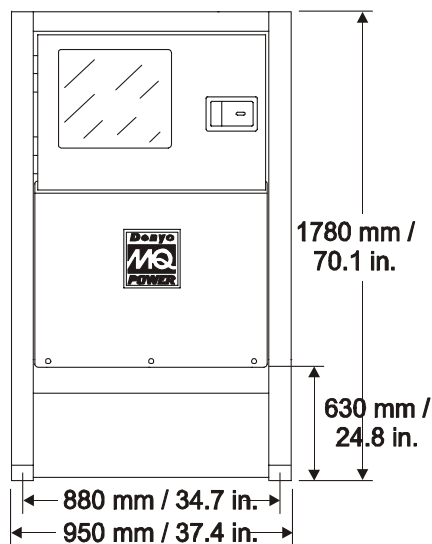

Weight	
Dry Weight	3627 lbs. (1645 kg)
Wet Weight	5064 lbs. (2297 kg)

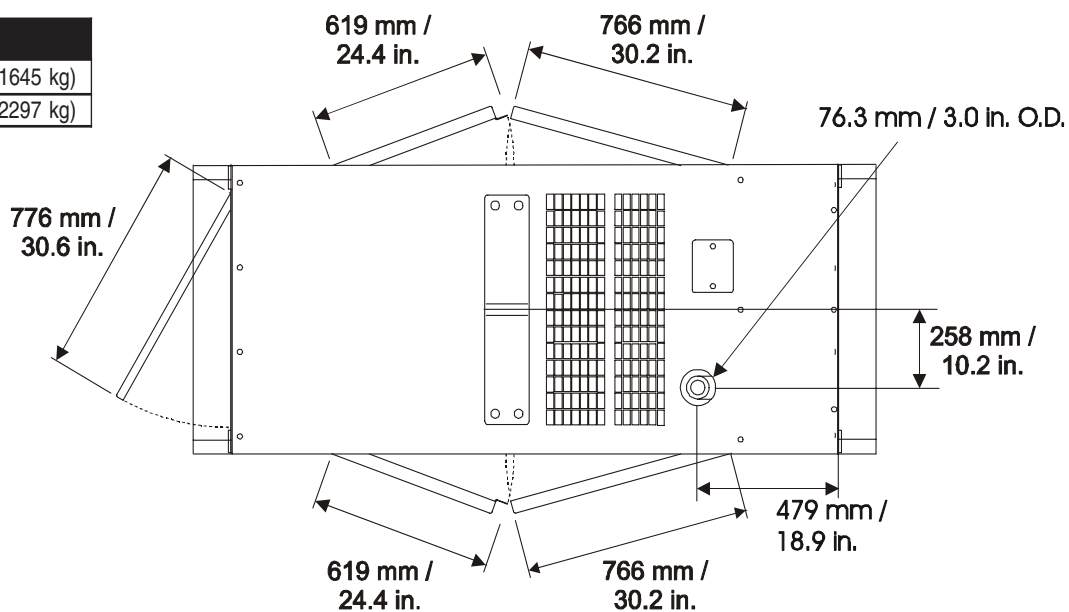

Units manufactured by Denyo Manufacturing Corporation

Your MQ Power dealer is:



MQ POWER
POST OFFICE BOX 6254
CARSON, CA 90749
310-537-3700 • 800-883-2551
FAX: 310-632-2656
E-MAIL: mqpower@multiquip.com
WEBSITE: www.mqpower.com