
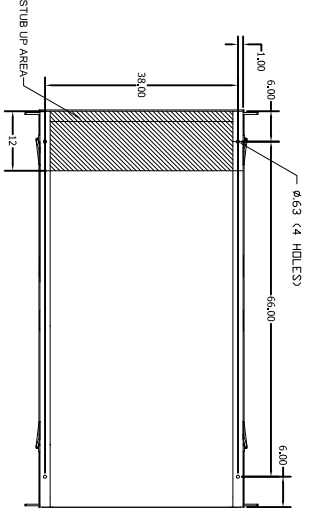
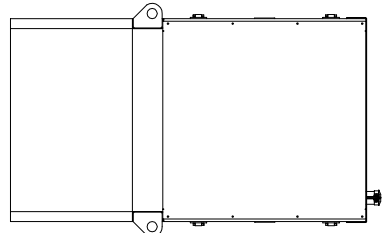
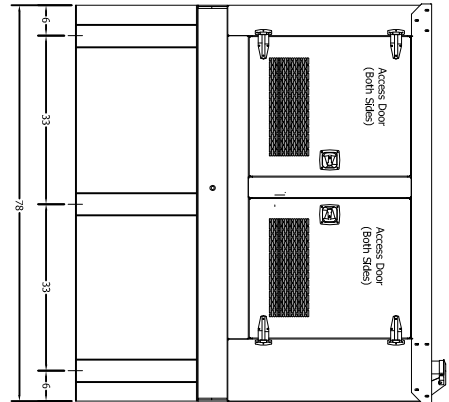
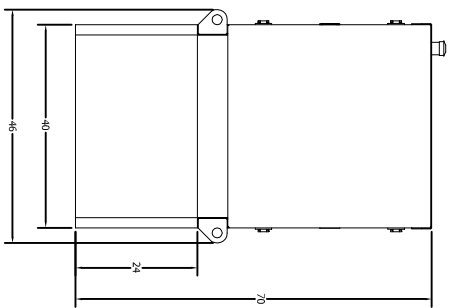


CUSTOMER APPROVAL SIGNATURE	APPROVAL DATE	COMMENTS
INCLUDED FEATURES		PART #
ENGINE PERKINS 4040-22G (radio through flywheel)	6K65733	535 Lbs.
ALTERNATOR MARATHON 28CCSL1505	28CCSL1505	275 Lbs.
SUB-BASE STRUCTURAL STEEL	V1087375	126 Lbs.
ISOLATORS (4) Berry Controls 256416	V1256416	4 Lbs.
ENCLOSURE: CLAY POWDER COAT, 14 GA STEEL STANDARD ENCLOSURE	V16R008459	465 Lbs.
FUEL TANK: U142 175 GALLON DOUBLE WALL	V1244078	788 Lbs.
SILENCER: STEEL-TOP-DOT VERTICAL MOUNT INTERNALLY MOUNTED	V162302	19 Lbs.
(1) BATTERIES: GROUP 26 STYLE 12V BATTERY RACK AND CABLES FOR BATTERY Note: Rack is integral to the shield	V16026	30 Lbs.
CIRCUIT BREAKER: AMP ABB ABB ENCLOSURE	MISC.	
FUEL LINES/FITTINGS	V16R003135	MISC.
FLUID DRAIN EXTENSION: WITH VALVE ROUTED TO SKID	V16108N	MISC.
CONTROL PANEL	MISC.	
HARDWARE: BOLTS, NUTS, WASHERS, LATCHES	MISC.	
FLUIDS: OIL & ANTIFREEZE	MISC.	
WEIGHT SUBTOTAL		2,242 Lbs.
MISC. WEIGHT 5% of subtotal		112 Lbs.
TOTAL WEIGHT:		2,354 Lbs.

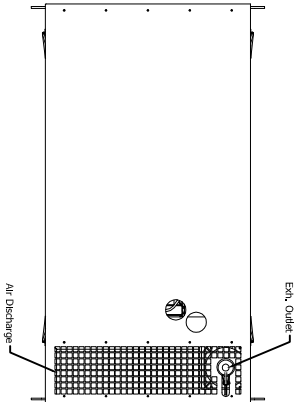

ENCLOSURE MATERIAL: 14 ga. Galvaneal  
 COLOR: Akzonobel Clay #20-8247HY POWDER COAT

DATE	BY	TITLE
8-21-11	SKAN	TAYLOR POWER SYSTEMS
	CREED	TD20 STANDARD ENCLOSURE
	QA	WITH 175 GAL BASE TANK
	ENG	
	APPROVED	
	SIZE	DWG NO.
	SCALE	REV