
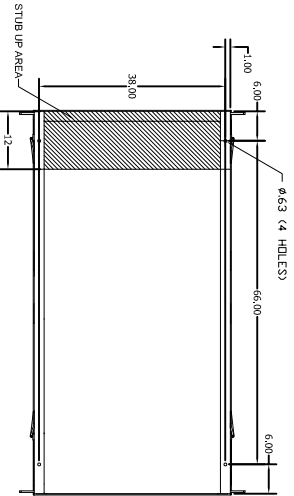

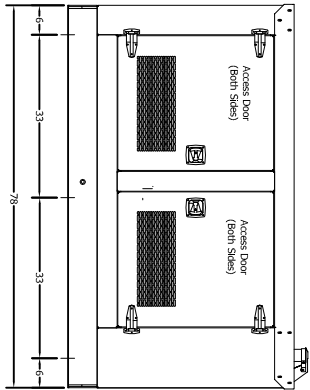



CUSTOMER APPROVAL SIGNATURE	APPROVAL DATE	COMMENTS
INCLUDED FEATURES		PART #
ENGINE: PERKINS 404D-22G (Generator through flywheel)		GM65733
ALTERNATOR: MARATHON 282CSLS1505		282CSLS1505
SUB-BASE: STRUCTURAL STEEL		V1087375
ISOLATORS (4) Barry Controls 2554416		V1256416
ENCLOSURE: CLAY POWDER COAT, 14 GA. STEEL STANDARD ENCLOSURE		V16809459
SILENCER: SIDE-IN TOP-OUT VERTICAL MOUNT INTERNALLY MOUNTED		V162302
D) BATTERIES: GROUP 26 STYLE 12V BATTERY RACK AND CABLES FOR BATTERY Note: Rack is integral to the skid		V16626
CIRCUIT BREAKER: AMP 400 ABB ENCLOSURE		MISC.
FUEL LINES/FITTINGS		V168003195
FUEL DRAIN EXTENSION: WITH VALVE ROUTED TO SKID		MISC.
CONTROL PANEL		V171081
HARDWARE: BOLTS, NUTS, WASHERS, LATCHES		MISC.
FLUIDS: OIL & ANTIFREEZE		MISC.
WEIGHT: SUBTOTAL		1,454 Lbs.
MISC. WEIGHT: 5% of subtotal		73 Lbs.
TOTAL WEIGHT:		1,527 Lbs.

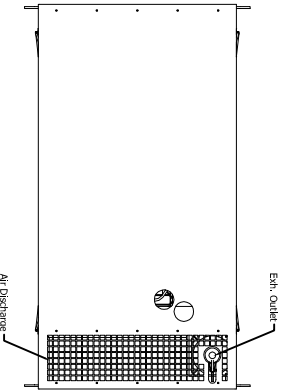

ENCLOSURE MATERIAL: 14 ga. Galvalume
COLOR: AKZONOBEL Gray #20-8247HY POWDER COAT

DESIGN	REV	DATE	BY
REVISED			
QA			
MG			
APPROVED			
TITLE		DATE	REV
TAYLOR POWER SYSTEMS			
TD20 STANDARD ENCLOSURE			
SCALE			