CUSTOMER APPROVAL SIGNATURE	APPROVAL DATE	COMMENTS	
INCLUDED FEATURES		PART #	WEIGHT
ENGINE: PERKINS 404D-22TG (radiator through flywheel)		GP65795	535 Lbs.
ALTERNATOR: MARATHON 283CSL1507		283CSL1507	350 Lbs.
SUB-BASE: STRUCTURAL STEEL		VT087375	126 Lbs.
ISOLATORS: (4) Barry Controls 256416		VT256416	4 Lbs.
ENCLOSURE: CLAY POWDER COAT, 14 GA. STEEL SOUND ATTENUATED ENCLOSURE		VTGRU08459	465 Lbs.
FUEL TANK: UL142 175 GALLON DOUBLE WALL		VT244078	788 Lbs.
SILENCER: SIDE-IN TOP-OUT VERTICAL MOUNT INTERNALLY MOUNTED		VT62302	19 Lbs.
(1) BATTERIES: GROUP 26 STYLE 12V BATTERY RACK AND CABLES FOR BATTERY Note: Rack is integral to the skid		VT6026	30 Lbs.
CIRCUIT BREAKER: AMP ABB ABB ENCLOSURE			MISC. MISC.
FUEL LINES/FITTINGS		VTGRU03135	MISC.
FLUID DRAIN EXTENSION: WITH VALVE ROUTED TO SKID		VTF108N	MISC.
CONTROL PANEL			MISC.
HARDWARE: BOLTS, NUTS, WASHERS, LATCHES			MISC.
FLUIDS: OIL& ANTIFREEZE			MISC.
WEIGHT SUBTOTAL			2,317 Lbs.
MISC. WEIGTH 5% of subtotal			115 Lbs.
TOTAL WEIGHT:			2,432 Lbs.

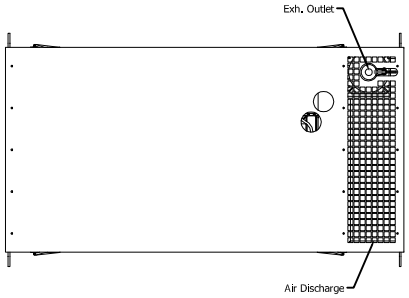

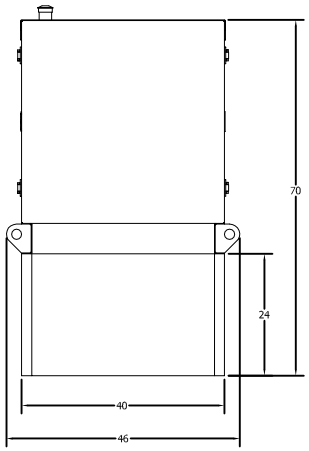

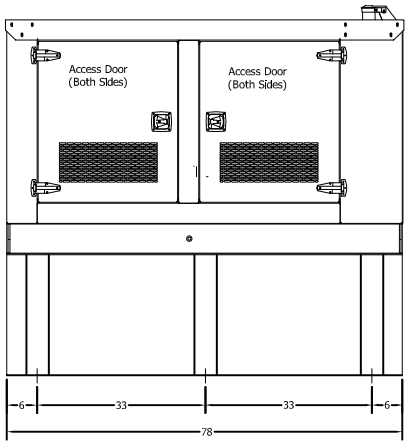

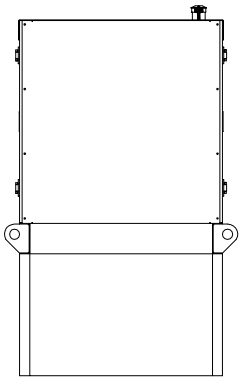

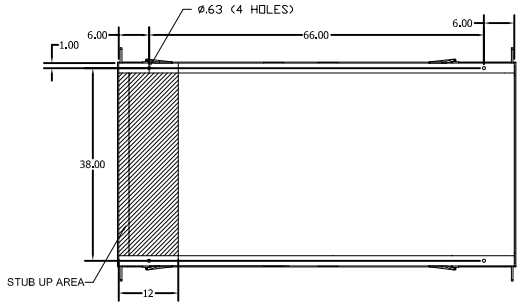

ENCLOSURE MATERIAL: 14 ga. Galvaneal
COLOR: AkzoNobel Clay #20-8247HY POWDER COAT

DRAWN JMM	8-31-11	TAYLOR POWER SYSTEMS
CHECKED		TITLE: TD28 SOUND ATTENUATED ENCLOSURE WITH 175 GAL BASETANK
QA		
MFG		
APPROVED		SIZE / DWG NO / REV
		SCALE