
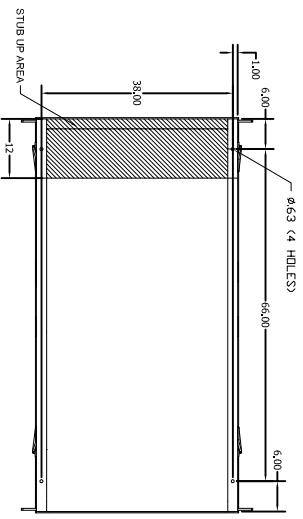
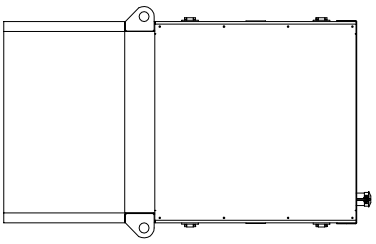
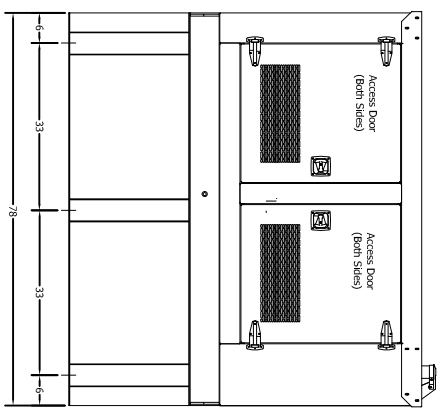
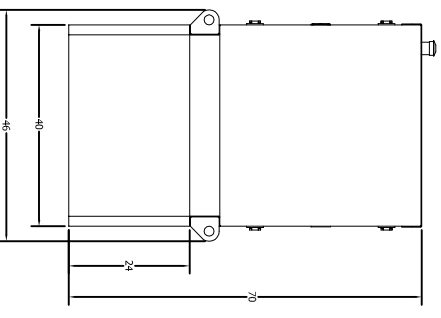


CUSTOMER APPROVAL SIGNATURE	APPROVAL DATE	COMMENTS
INCLUDED FEATURES		PART #
ENGINE: PERKINS 4040-22TAG (generator through flywheel)		WEIGHT
ALTERNATOR: MARATHON 283CS1507		675 Lbs.
SUB-BASE: STRUCTURAL STEEL		283CS1507 350 Lbs.
ISOLATORS: (4) Berry Controls 256416		V17087375 126 Lbs.
ENCLOSURE: CLAY POWDER COAT, 14 GA. STEEL SOUND ATTENUATED ENCLOSURE		V1756416 4 Lbs.
FUEL TANK: UL142 175 GALLON DOUBLE WALL		VTR008459 465 Lbs.
SILENCER: SIDE-IN TOP-OUT VERTICAL MOUNT INTERNALLY MOUNTED		V1744078 788 Lbs.
(3) BATTERIES: GRIP-26 STYLE 12V BATTERY RACK AND CABLES FOR BATTERY Note: Rack is integral to the skid		V176292 19 Lbs.
CIRCUIT BREAKER: AMP ABB ABB ENCLOSURE		V16026 30 Lbs.
FUEL LINES/FITTINGS		MISC. MISC.
FLUID DRAIN EXTENSION: WITH VALVE ROUTED TO SKID		VTR003135 MISC.
CONTROL PANEL		V17108N MISC.
HARDWARE: BOLTS, NUTS, WASHERS, LATCHES		MISC. MISC.
FLUIDS: OIL & ANTIFREEZE		MISC. MISC.
WEIGHT SUBTOTAL		2,457 Lbs.
MISC. WEIGHT SZ. of subtotal		129 Lbs.
TOTAL WEIGHT:		2,580 Lbs.

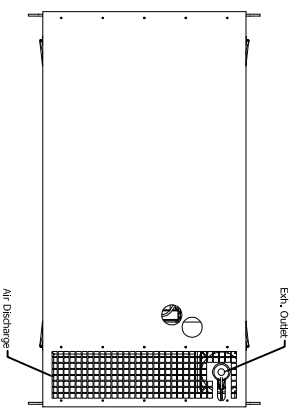

ENCLOSURE MATERIAL: 14 ga. Galvalume  
COLOR: AkzoNobel Clay #20-8247HY POWDER COAT

DESIGN	8-31-11	TITLE	TAYLOR POWER SYSTEMS
CHECKED		DATE	
QA		DESCRIPTION	TD30 SOUND ATTENUATED ENCLOSURE WITH 175 GAL BASETANK
APPROVED		SCALE	
		REV	