CUSTOMER APPROVAL SIGNATURE	APPROVAL DATE	COMMENTS

INCLUDED FEATURES	PART #	WEIGHT
ENGINE: PERKINS 404D-22TAG (radiator through flywheel)	GR65815	675 Lbs.
ALTERNATOR: MARATHON 283CSL1507	283CSL1507	350 Lbs.
SUB-BASE: STRUCTURAL STEEL	VT087375	126 Lbs.
ISOLATORS: (4) Barry Controls 256416	VT256416	4 Lbs.
ENCLOSURE: CLAY POWDER COAT, 14 GA. STEEL SOUND ATTENUATED ENCLOSURE	VTGRU08459	465 Lbs.
FUEL TANK: UL142 270 GALLON DOUBLE WALL	VT364078	1056 Lbs.
SILENCER: SIDE-IN TOP-OUT VERTICAL MOUNT INTERNALLY MOUNTED	VT62302	19 Lbs.
(1) BATTERIES: GROUP 26 STYLE 12V BATTERY RACK AND CABLES FOR BATTERY Note: Rack is integral to the skid	VT6026	30 Lbs.
CIRCUIT BREAKER: AMP ABB ABB ENCLOSURE		MISC. MISC.
FUEL LINES/FITTINGS	VTGRU03135	MISC.
FLUID DRAIN EXTENSION: WITH VALVE ROUTED TO SKID	VTF108N	MISC.
CONTROL PANEL		MISC.
HARDWARE: BOLTS, NUTS, WASHERS, LATCHES		MISC.
FLUIDS: OIL& ANTIFREEZE		MISC.
WEIGHT SUBTOTAL		2,725 Lbs.
MISC. WEIGTH 5% of subtotal		136 Lbs.
TOTAL WEIGHT:		2,861 Lbs.

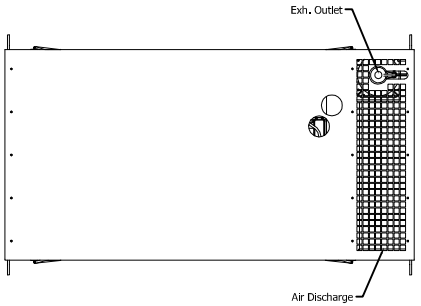

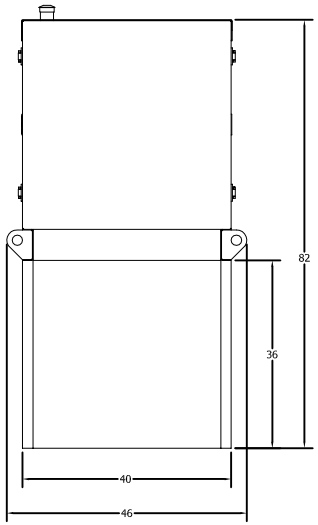

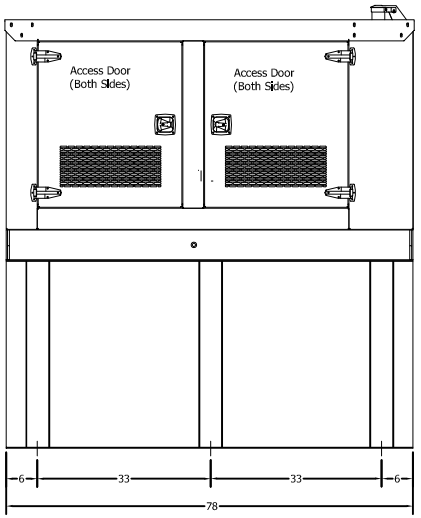

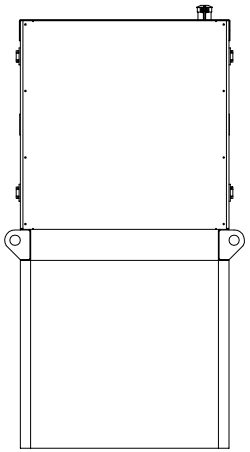

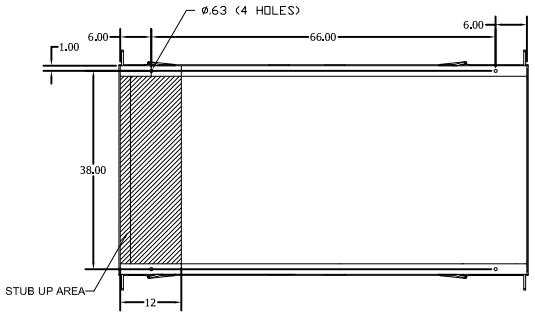

ENCLOSURE MATERIAL: 14 ga. Galvaneal
COLOR: AkzoNobel Clay #20-8247HY POWDER COAT

DRAWN JMM	8-31-11	TAYLOR POWER SYSTEMS
CHECKED		TITLE: TD30 SOUND ATTENUATED ENCLOSURE WITH 270 GAL BASETANK
QA		
MFG		
APPROVED		SIZE / DWG NO / REV
		SCALE