
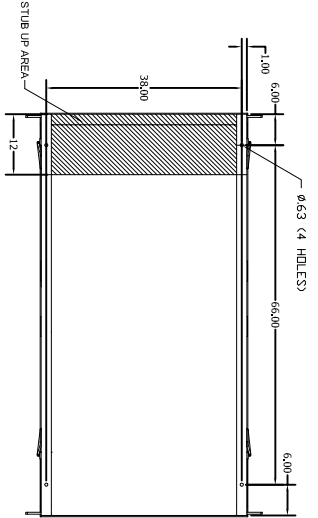

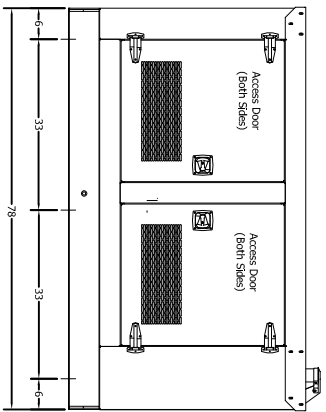



CUSTOMER APPROVAL SIGNATURE	APPROVAL DATE	COMMENTS
INCLUDED FEATURES		PART #
ENGINE: PERKINS 4040-22TAG (radiator through flywheel)		675 Lbs.
ALTERNATOR: MARATHON 283CSL1507		350 Lbs.
SUB-BASE: STRUCTURAL STEEL		126 Lbs.
ISOLATORS (4) Berry Controls 256416		4 Lbs.
ENCLOSURE: CLAY POWDER COAT, 14 GA. STEEL STANDARD ENCLOSURE		465 Lbs.
SILENCER: SIDE-IN TOP-OUT VERTICAL MOUNT INTERNALLY MOUNTED		19 Lbs.
(1) BATTERIES: GROUP 26 STYLE 12V BATTERY RACK AND CABLES FOR BATTERY Note: Rack is integral to the skid		30 Lbs.
CIRCUIT BREAKER: AMP ABB ABB ENCLOSURE		MISC.
FUEL LINES/FITTINGS		VTGR003135
FLUID DRAIN EXTENSION WITH VALVE ROUTED TO SKID CONTROL PANEL		VT1108N
HARDWARE: BOLTS, NUTS, WASHERS, LATCHES		MISC.
FLUIDS: OIL & ANTIFREEZE		MISC.
WEIGHT SUBTOTAL		1,669 Lbs.
MISC. WEIGHT: SK. of subtotal		83 Lbs.
TOTAL WEIGHT:		1,752 Lbs.

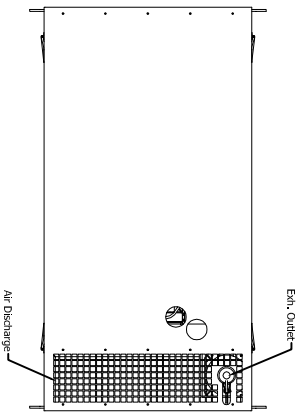

ENCLOSURE MATERIAL: 14 ga. Galvanneal
COLOR: AkzoNobel Clay #20-8247HY POWDER COAT

DESIGN	8-31-11	TITLE	TAYLOR POWER SYSTEMS
CHECKED			
QA			
WPC			
APPROVED			
SIZE		DWG NO.	
SCALE			REV

TD30 STANDARD ENCLOSURE