
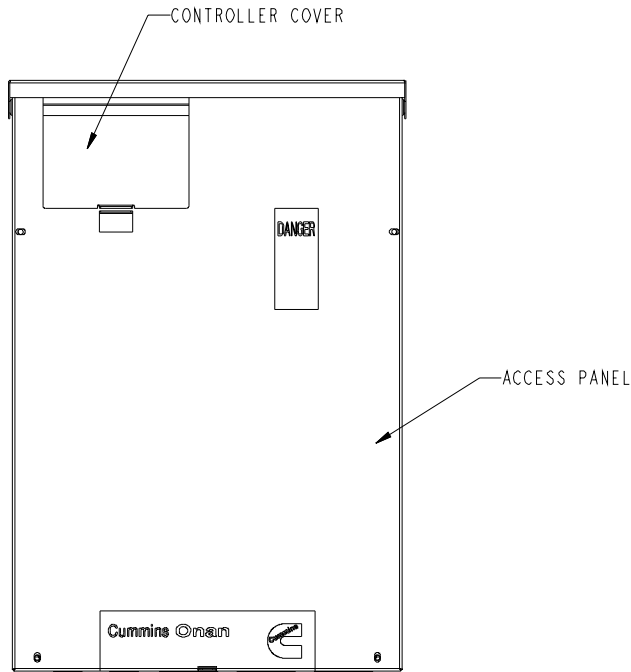
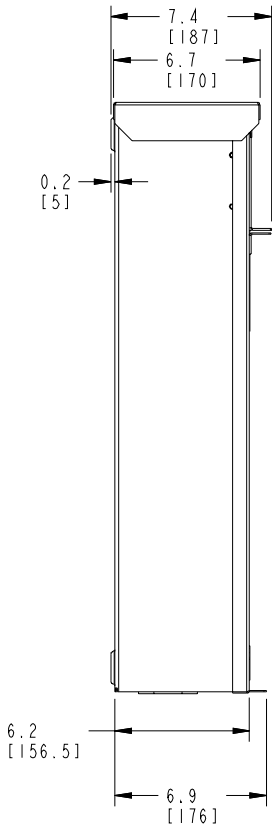


REL NO	LTR	NO	REVISION	ZONE	DWN	CKD	APVD	DATE
FRD30760	A	1	PRODUCTION RELEASE	-	SC	JM	YW	02-05-07
FRD31459	B	1	UPDATED PICTORIALY	-	GAC	JM	YW	03-29-07
		2	REVISED NOTE 1 & 4	2B	JM	JR	YW	05-24-07
		3	ADD INCH DIMENSIONS	-	JM	JR	YW	05-24-07
		4	ADD LUG CAPACITY TABLE	2A	JM	JR	YW	05-24-07
FRD32453	C	1	UPDATED PICTORIALY	-	JM	JR	YW	06-08-07

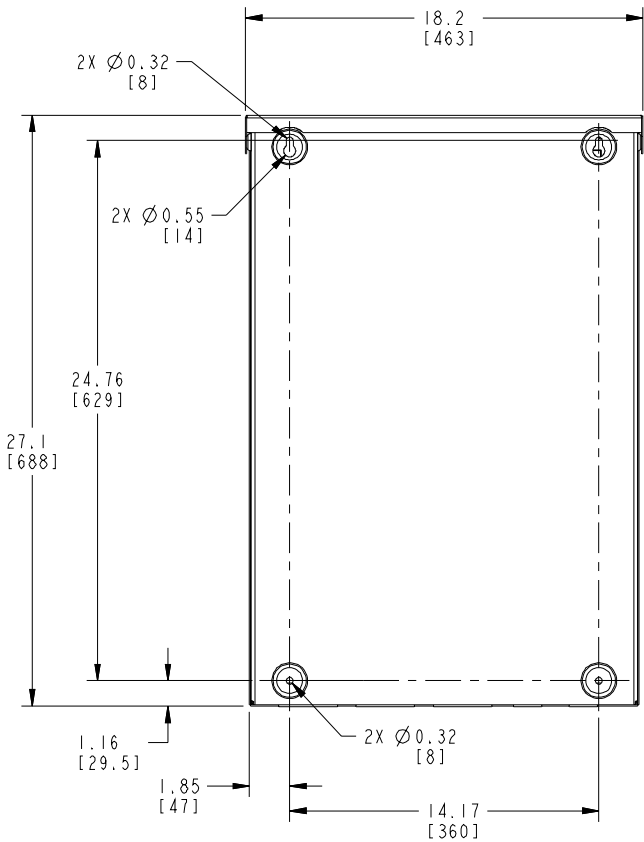

- NOTE:
- ENCLOSURE: TYPE 3R
 - APPROX WEIGHT: 46 LBS [21Kg]
 - USE SEPARATE CONDUITS FOR CONTROL WIRING & POWER WIRING. DO NOT COMBINE
 - DIMENSIONS IN [] ARE IN MILLIMETERS.

LUG CAPACITY	
UTILITY/GEN/LOAD	#6 AWG-300 MCM CU/AL
NEUTRAL	#6 AWG-300 MCM CU/AL
GROUND	#14 AWG-1/0 CU/AL

RSS-200 OUTLINE DRAWING

QTY	ITEM	PART NO	DESCRIPTION OR MATERIAL
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS			
SIM TO		DWN	SCOTT CHEN
DO NOT SCALE PRINT		CKD	JOHN MORLEY
		APVD	YEN WOO
		DATE	09-26-06
		SITE CODE	
FOR INTERPRETATION OF DIMENSIONS AND TOLERANCES, SEE ASME Y14.5M-1994		FIRST USED ON	RSS-200
ANG TOL: ± 1.0°		SCALE:	1/4
		PGF	D
		0500_4503	
		SHEET	1 OF 1
		REV	C