



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS CONFIDENTIAL AND PROPRIETARY AND IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE EXPRESSED WRITTEN PERMISSION OF MULTQUIP COMPANY.


DWG. NO.		REVISION	REVISIONS	
200157		D		1
ZONE	LTR	DESCRIPTION	DATE	APPROVED
D		CHANGED THE SCALE ON VIEW "A" & PANEL	12-6-01	JT




SNAP BACK METAL COVER

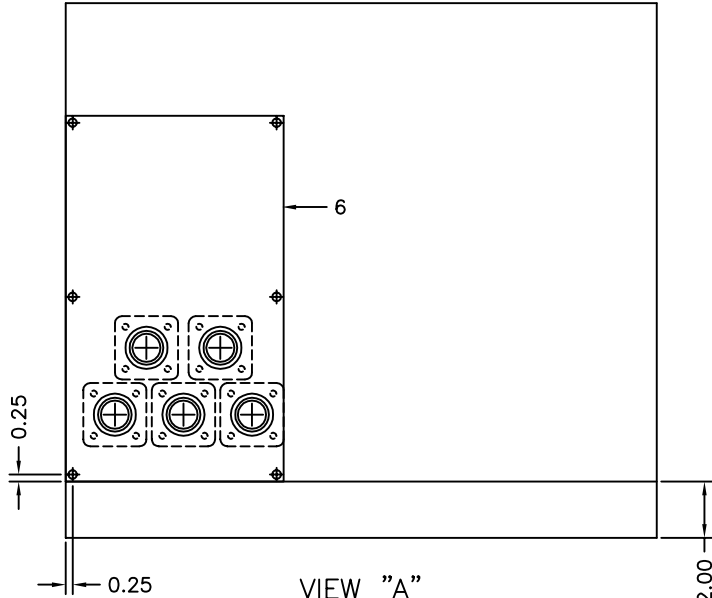


VIEW "A"
(SCALE: 3=1)

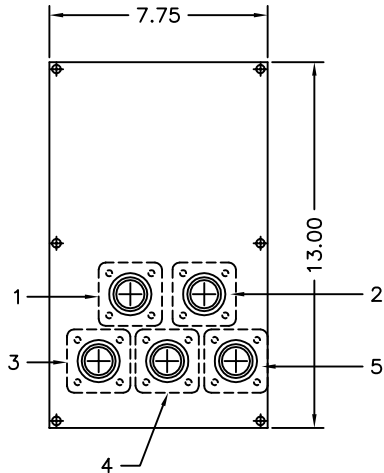

SINGLE CONDUCTOR CAMLOK PANEL
(SCALE: 3=1)

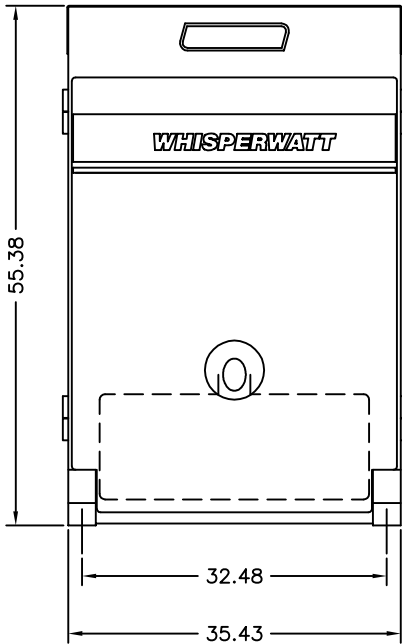

FRONT VIEW

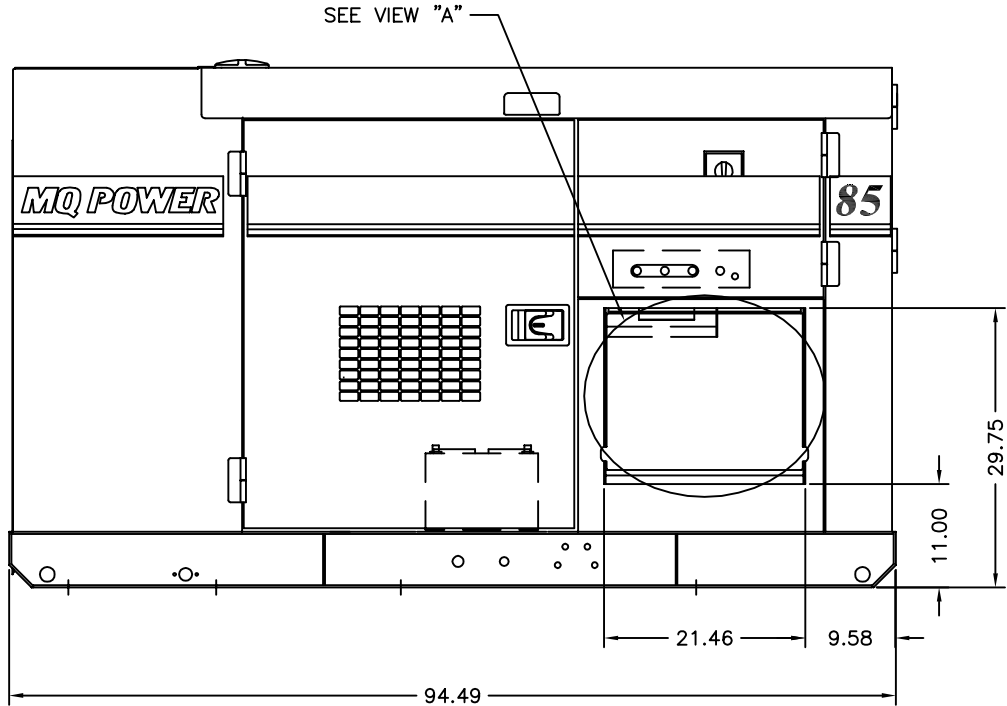

LEFTSIDE VIEW

MATERIAL LIST				
ITEM	PART NUMBER	QTY	DESCRIPTION	MANUFACTURER
1	E1016-1730	1	FEMALE DOUBLE SET-SCREW (WHITE)	CAM-LOK
2	E1016-1729	1	FEMALE DOUBLE SET-SCREW (GREEN)	CAM-LOK
3	E1016-1727	1	FEMALE DOUBLE SET-SCREW (RED)	CAM-LOK
4	E1016-1725	1	FEMALE DOUBLE SET-SCREW (BLACK)	CAM-LOK
5	E1016-1731	1	FEMALE DOUBLE SET-SCREW (BLUE)	CAM-LOK
6	CAM-34551	1	SINGLE CONDUCTOR CAMLOK PANEL (200172)	MQP
6	CAM-34552	1	TWO CONDUCTOR CAMLOKS PANEL (200173)	MQP
7	A100895-1	5	SNAP BACK COVER	CAM-LOK
8	100444	10	SPACERS	CAM-LOK

NOTES:

1. CAMLOK CONNECTORS RATED UP TO 400 AMPERES.
2. ACCEPTS CABLE SIZE FROM #2 - 4/0.
3. OPTIONAL SNAP BACK COVER - INCLUDED.
4. FACTORY LUG CONNECTIONS REMAIN IN PLACE.
5. ADD SINGLE CONDUCTOR CAMLOK PER PHASE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE : FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CUSTOMER		MQ POWER TEL: (310) 537-3700/FAX: (310) 632-2656 18910 WILMINGTON AVENUE CARSON, CA 90746				
		JOB NO.						
		APPROVALS		DATE		OUTLINE-DCA 85SSJU CAMLOK OUTPUT		
MATERIAL		DRAWN J. TRAN		4-22-01				
FINISH		CHECKED J. ROSE		4-23-01		SIZE D	FSCM NO.	DWG. NO. 200157
DO NOT SCALE DRAWING		SALESMAN				SCALE 1 = 10		SHEET 1 / 1