THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS CONFIDENTIAL AND PROPRIETARY AND IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE EXPRESSED WRITTEN PERMISSION OF MULTIQUIP COMPANY.


DWG. NO. 200824 REVISION

REVISIONS


ZONE	LTR	DESCRIPTION	DATE	APPROVED


CONTROL PANEL	
No.	NAME
1	FREQUENCY METER
2	AC VOLTMETER
3	VOLTMETER CHANGE-OVER SWITCH
4	AC AMMETER
5	AMMETER CHANGE-OVER SWITCH
6	VOLTAGE REGULATOR
7	CIRCUIT BREAKER

OPERATING PANEL	
No	NAME
31	OIL PRESSURE GAUGE
32	WATER TEMPERATURE GAUGE
33	CHARGING AMMETER
34	FUEL GAUGE
35	TACHOMETER
36	PANEL LIGHT
37	PANEL LIGHT SWITCH
38	AUTO START/STOP CONTROLLER (ECU CONTROLLER)
39	PREHEAT LAMP
40	FUEL LEAK DETECTED ALARM LAMP

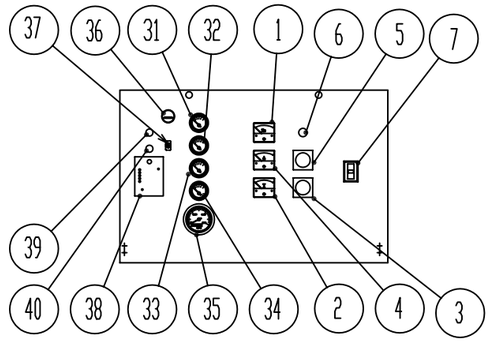

CONTROL AND OPERATION PANEL

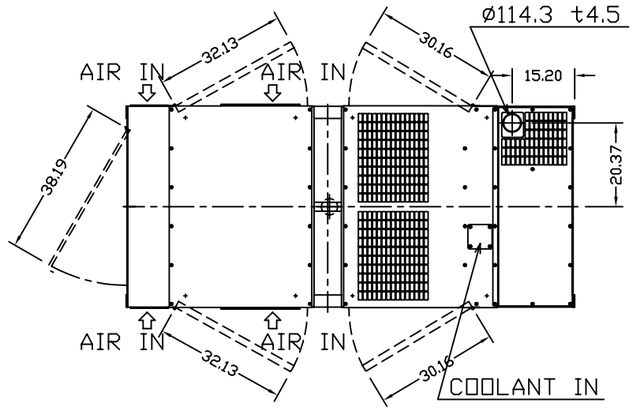

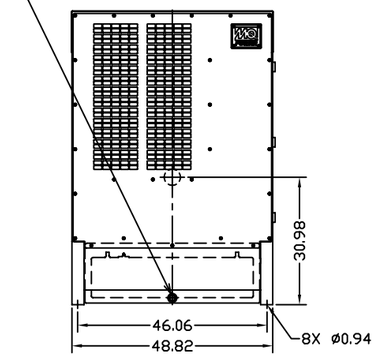

ENVIRONMENTAL TANK DRAIN

3-PHASE OUTPUT TERMINAL
4-M12P1.75


CIRCUIT BREAKER (AUX. POWER)

VOLTAGE AND CONNECT SELECTOR SWITCH

MUFFLER

EXHAUST GAS OUT

AIR IN

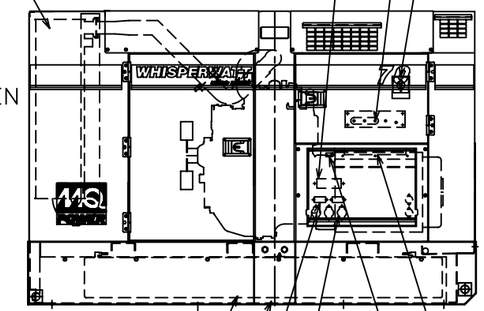

FUEL TANK(126GAL.)


ENVIRONMENTAL TANK(49GAL.)

AUX. POWER RECEPTACLE
120V 20A

AUX. POWER RECEPTACLE
240V 50A

CABLE OUTLET

TERMINAL BLOCK
(FOR START SIGNAL)




RADIATOR

AIR CLEANER

HEATED AIR OUT

COOLING FAN

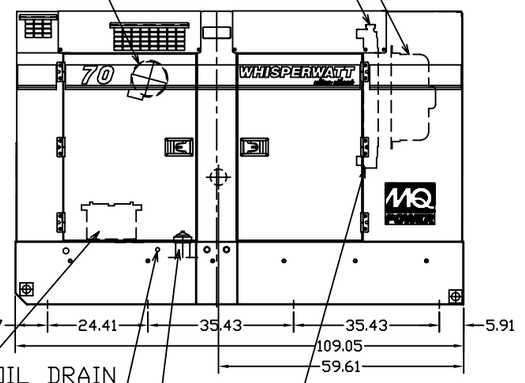

BATTERY

OIL DRAIN

FUEL FILLER
(IN THE BONNET)

COOLANT DRAIN
(IN THE BONNET)

ENGINE	: JOHN DEERE 4045TF275
GENERATOR	: DB-0831J2
BATTERY	: 12V-150Ah x 2 24V SYSTEM
FUEL TANK	: Approx. 126 Gal. (475L)
NET WEIGHT	: Approx. 4,692lbs (2130Kg)

⌖CENTER OF GRAVITY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE :
FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ±

DERIVED FROM DENYO M28034 00313

REV | DATE

CAD CODE 200824

MATERIAL

FINISH

DO NOT SCALE DRAWING

CUSTOMER

JOB NO.

APPROVALS | DATE

DRAWN J. TRAN 9-17-04

CHECKED J. ROSE

SALESMAN

MQ POWER
TEL: (310) 537-3700/FAX: (310) 632-2656
18910 WILMINGTON AVENUE
CARSON, CA 90746

OUTLINE DRAWING
DCA 70USJ

SIZE D | FSCM NO. | DWG. NO. 200824

SCALE 1 = 18 | SHEET 1 / 1

B 200824