


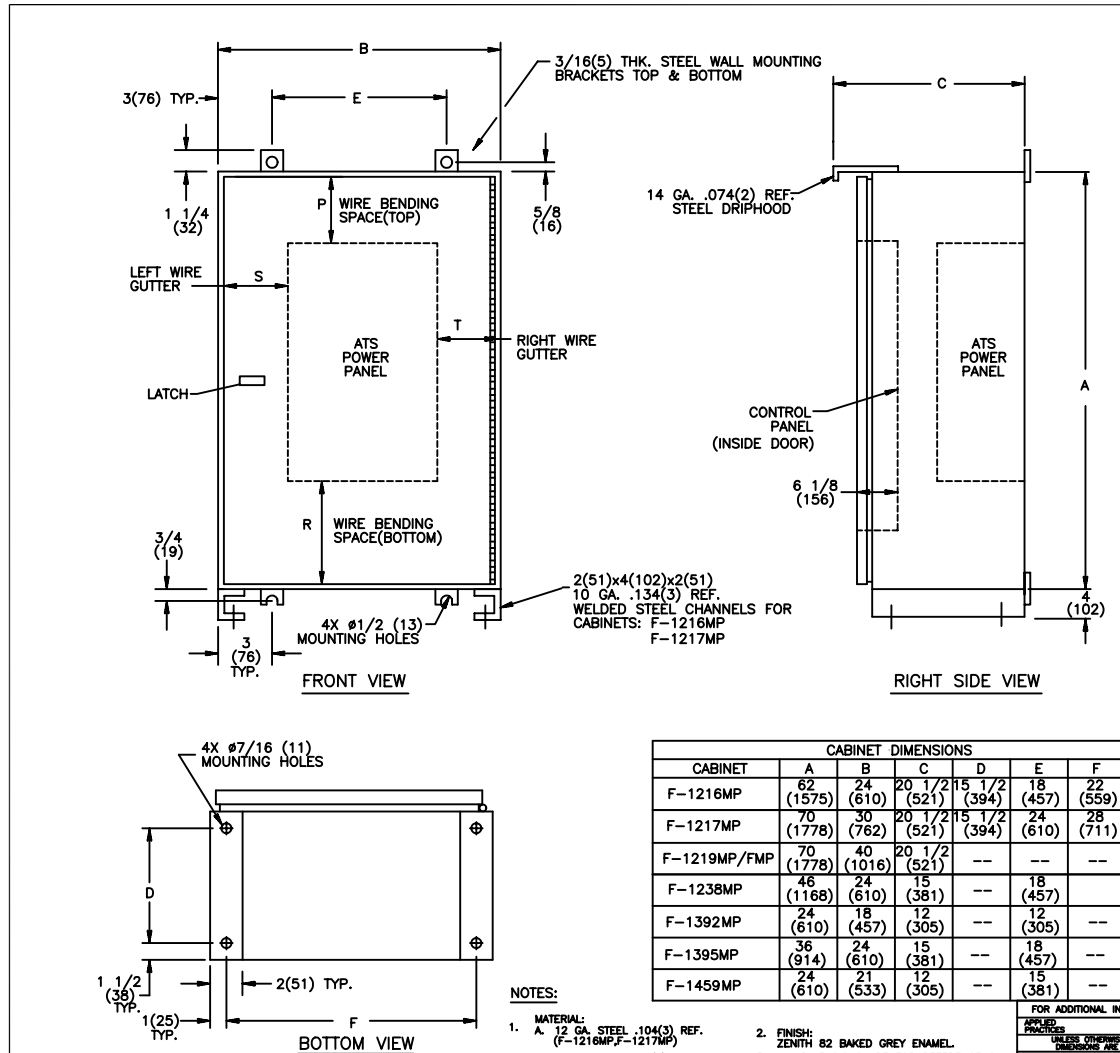

CABINET DIMENSIONS						
CABINET	A	B	C	D	E	F
F-1216MP	62 (1575)	24 (610)	20 1/2 (521)	15 1/2 (394)	18 (457)	22 (559)
F-1217MP	70 (1778)	30 (762)	20 1/2 (521)	15 1/2 (394)	24 (610)	28 (711)
F-1219MP/FMP	70 (1778)	40 (1016)	20 1/2 (521)	--	--	--
F-1238MP	46 (1168)	24 (610)	15 (381)	--	18 (457)	--
F-1392MP	24 (610)	18 (457)	12 (305)	--	12 (305)	--
F-1395MP	36 (914)	24 (610)	15 (381)	--	18 (457)	--
F-1459MP	24 (610)	21 (533)	12 (305)	--	15 (381)	--

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
H	S-7837	09/24/02	GG KL

MODEL	AMPERAGE	NO. POLES	NEMA (3R) CABINET	LUG RANGE	WIRE BENDING SPACE P(TOP) R(BOTTOM)	WIRE GUTTERS S(LEFT) T(RIGHT)
ZTG2K SWITCHES	40-150	2,3	F-1392MP	(40-150A) #8-3/0 (8-85mm ²)	7 (178)	3 1/2 (89)
ZTG3K SWITCHES	200	4	F-1392MP	(200A) #6-250 MCM (13-127mm ²)	8 (203)	4 1/2 (114)
ZTG3K SWITCHES	225	2,3	F-1459MP	(200A) #6-250 MCM (13-127mm ²)	7 (178)	8 7/8 (225)
ZTG3K SWITCHES	225	4	F-1459MP	(200A) #6-250 MCM (13-127mm ²)	15 (381)	7 1/2 (191)
ZTG2K SWITCHES	225	2	F-1395MP	#6-250 MCM (13-127mm ²)	13 5/8 (346)	6 1/2 (165)
ZTG2K SWITCHES	225	3	F-1395MP	#6-250 MCM (13-127mm ²)	15 (381)	8 7/8 (225)
ZTG3K SWITCHES	260-400	2	F-1238MP	#8-250 MCM (8-127mm ²)	14 3/4 (375)	5 9/16 (141)
ZTG3K SWITCHES	260-400	3	F-1238MP	#8-250 MCM (8-127mm ²)	14 5/8 (371)	5 9/16 (141)
ZTG4K SWITCHES	600	2,3	F-1216MP	(QTY 2) #2-600 MCM (33-304mm ²)	17 1/2 (444)	10 7/8 (276)
ZTG4K SWITCHES	600	4	F-1216MP	(QTY 4) #2-600 MCM (33-304mm ²)	17 5/8 (448)	9 (229)
ZTG2K SWITCHES	800	2,3	F-1217MP	(QTY 2) #2-600 MCM (33-304mm ²)	18 11/16 (475)	18 5/8 (473)
ZTG2K SWITCHES	800	4	F-1217MP	(QTY 4) #2-600 MCM (33-304mm ²)	18 11/16 (475)	18 5/8 (473)
ZTG2K SWITCHES	100-400	2	F-1238MP	#8-250 MCM (8-127mm ²)	14 3/4 (375)	14 5/8 (371)
ZTG2K SWITCHES	100-400	3	F-1238MP	#8-250 MCM (8-127mm ²)	14 5/8 (371)	5 9/16 (141)
ZTG2K SWITCHES	100-400	4	F-1238MP	#8-250 MCM (8-127mm ²)	14 5/8 (371)	5 9/16 (141)
ZTG3K SWITCHES	600	2,3	F-1216MP	(QTY 2) #2-600 MCM (33-304mm ²)	17 1/2 (444)	10 7/8 (276)
ZTG3K SWITCHES	600	4	F-1216MP	(QTY 4) #2-600 MCM (33-304mm ²)	17 5/8 (448)	9 (229)
ZTG3K SWITCHES	800	2,3	F-1217MP	(QTY 2) #2-600 MCM (33-304mm ²)	18 11/16 (475)	18 5/8 (473)
ZTG3K SWITCHES	800	4	F-1217MP	(QTY 4) #2-600 MCM (33-304mm ²)	18 11/16 (475)	18 5/8 (473)

THIRD ANGLE PROJECTION

GE PROPRIETARY AND CONFIDENTIAL INFORMATION

This document is the property of General Electric Company ("GE") and contains proprietary information of GE. This document is loaned on the express condition that neither it nor the information contained therein shall be disclosed to others without the express written consent of GE Industrial Systems, and that the information shall be used by the recipient only as approved expressly by GE Industrial Systems. This document shall be returned to GE upon its request. This document may be subject to certain restrictions under U.S. export control laws and regulations.

FOR ADDITIONAL INFO REFER TO

APPLIED PRACTICES

TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 PL. DECIMALS ± .020

3 PL. DECIMALS ± .005

ANGLES ± 1°

FRACTIONS ± 1/64

FINISH

AutoCad Generated

SIGNATURES

DATE

11/01/00

GE Zenith Controls

TITLE

TRANSFER SWITCHES
NEMA 3R ENCLOSURE

FIRST MADE FOR:

SIZE CAGE CODE DWG NO

B 52C-1035

SCALE: -

SHEET 2 OF 4