

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS CONFIDENTIAL AND PROPRIETARY AND IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE EXPRESSED WRITTEN PERMISSION OF MULTIQUIP COMPANY.


DWG. NO. 200161 | REVISION C

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
	C	CHANGED THE SCALE ON VIEW "A" & PANEL	12-6-01	JT




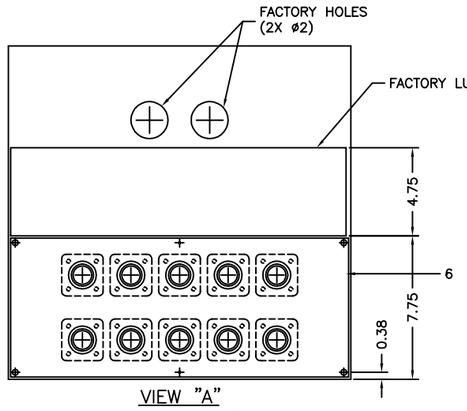


VIEW "A"
(SCALE: 3=1)

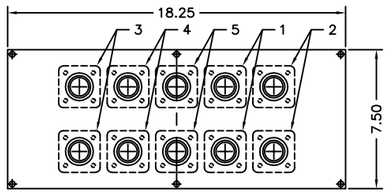

PANEL
(SCALE: 3=1)

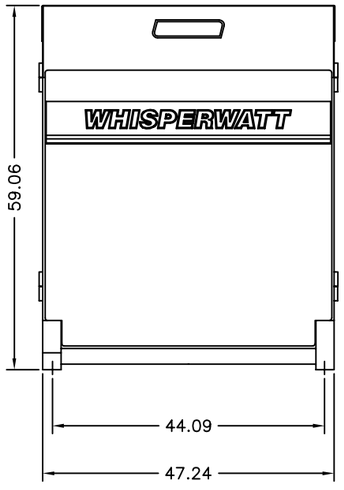

FRONT VIEW

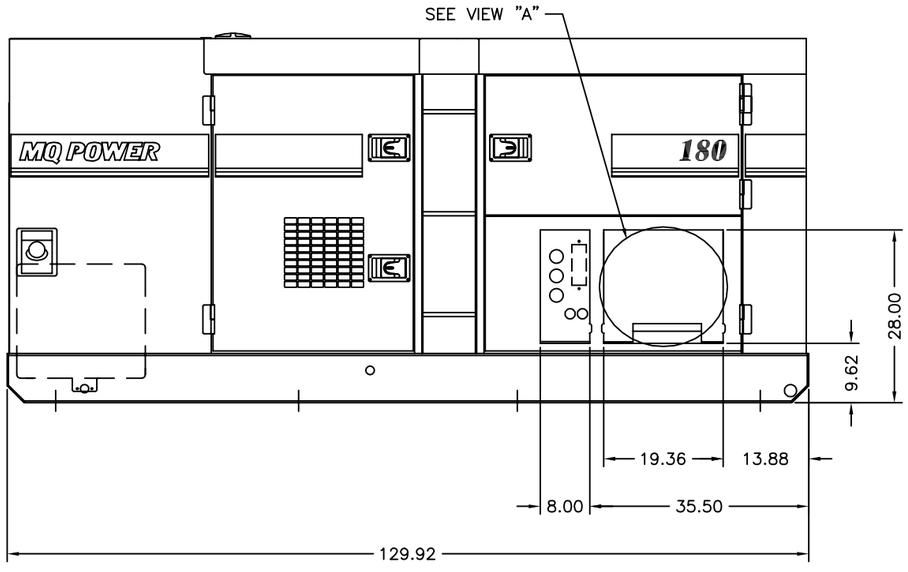

LEFTSIDE VIEW

MATERIAL LIST				
ITEM	PART NUMBER	QTY	DESCRIPTION	MANUFACTURER
1	E1016-1730	2	FEMALE DOUBLE SET-SCREW (WHITE)	CAM-LOK
2	E1016-1729	2	FEMALE DOUBLE SET-SCREW (GREEN)	CAM-LOK
3	E1016-1727	2	FEMALE DOUBLE SET-SCREW (RED)	CAM-LOK
4	E1016-1725	2	FEMALE DOUBLE SET-SCREW (BLACK)	CAM-LOK
5	E1016-1731	2	FEMALE DOUBLE SET-SCREW (BLUE)	CAM-LOK
6	200176	1	TWO CONDUCTOR CAMLOKS PANEL	MQP
7	A100895-1	10	SNAP BACK COVER	CAM-LOK
8	100444	20	SPACERS	CAM-LOK

NOTES:

1. CAMLOK CONNECTORS RATED UP TO 400 AMPERES.
2. ACCEPTS CABLE SIZE FROM #2 – 4/0.
3. OPTIONAL SNAP BACK COVER – INCLUDED.
4. FACTORY LUG CONNECTIONS REMAIN IN PLACE.
5. ADD TWO CONDUCTOR CAMLOKS PER PHASE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE :
FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ±

DERIVED FROM

REV	DATE
C	12-6-01

CAD CODE 200161

MATERIAL

FINISH

DO NOT SCALE DRAWING

CUSTOMER

JOB NO.

APPROVALS	DATE
DRAWN J. TRAN	4-23-01
CHECKED J. ROSE	4-24-01
SALESMAN	

MQ POWER
TEL: (310) 537-3700/FAX: (310) 632-2656
18910 WILMINGTON AVENUE
CARSON, CA 90746

OUTLINE-DCA 180SSK
CAMLOK OUTPUT

SIZE	FSCM NO.	DWG. NO.
D		200161

SCALE 1 = 12 | SHEET 1 / 1

DWG. NO. 200161 | REVISION C